

ARS™ 5K Re-Usable Anchor



No.1008 ARS 5K

Temporary fall protection anchor forms easily to any slope. Flatten stem to evacuate. Discontinued item replaced by Form-IT anchor.


Features

- 18 ga 430 stainless steel
- 5,000lb min. tensile strength
- Single use
- 10pc 16d nail pack
- Attaches to wood framing
- Includes Form-IT instruction manual
- Complies with ANSI Z359.1

**4 Pack
Retail
Box**



**10pc 16d
Nail Pack**

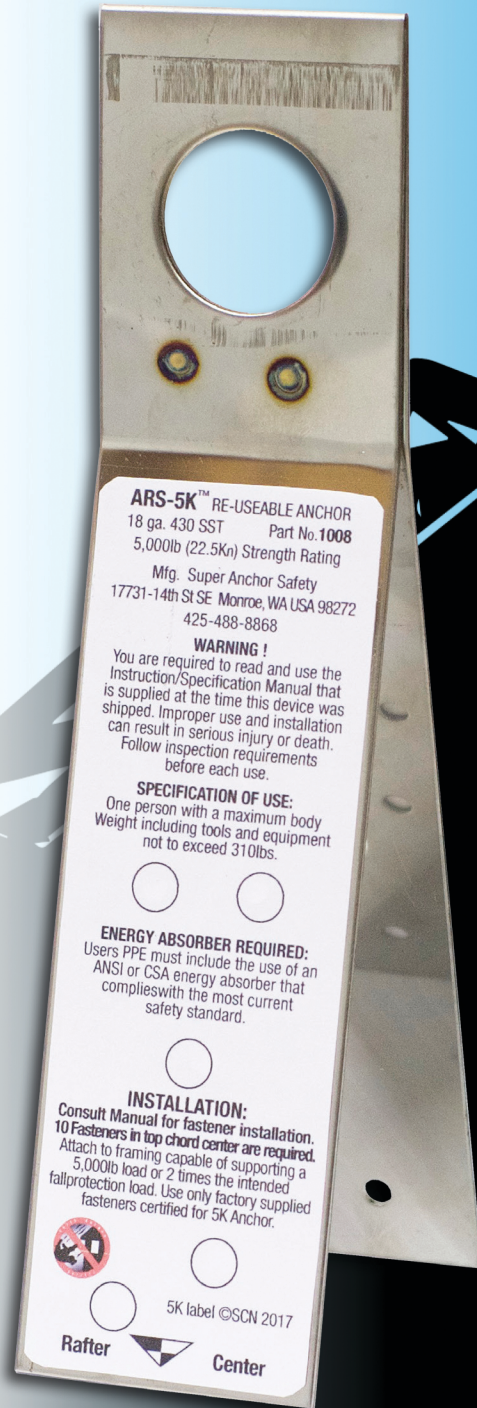

**No.1008
ARS 5K**

ARS-5K™ RE-USEABLE ANCHOR
18 ga. 430 SST Part No.1008
5,000lb (22.5Kn) Strength Rating
Mfg. Super Anchor Safety
17731-14th St SE Monroe, WA USA 98272
425-488-8868

WARNING !
You are required to read and use the Instruction/Specification Manual that is supplied at the time this device was shipped. Improper use and installation can result in serious injury or death. Follow inspection requirements before each use.

SPECIFICATION OF USE:
One person with a maximum body Weight including tools and equipment not to exceed 310lbs.

ENERGY ABSORBER REQUIRED:
Users PPE must include the use of an ANSI or CSA energy absorber that complies with the most current safety standard.

INSTALLATION:
Consult Manual for fastener installation. 10 Fasteners in top chord center are required. Attach to framing capable of supporting a 5,000lb load or 2 times the intended fall protection load. Use only factory supplied fasteners certified for 5K Anchor.



5K label ©SCN 2017

Rafter



Center

Ordering Information

Part No.	Part Name	Packaging
1008	ARS 5K	Bulk ▲ 4 Pack

▲ Limited stock approx 1,200 4 packs



Super Anchor Safety

17731 147th Street SE
Monroe, WA 98272, USA
www.superanchor.com
1-855-301-4575