


# Tie-Off Straps

**No.6053-D**  
72"

Tie-Off Straps are made from 2" wide polyester or nylon and are designed for use as temporary anchorage points to connect vertical lifelines, SRL's, web lanyards and rope lanyards. Use on wood, steel and concrete structures. Tie-Off straps are wrapped, cinched around the structure to make for a secure anchor or can be embedded into concrete and evacuated when finished with the job.

## Features

- Lowest cost tie-off strap
- Fall arrest/fall restraint
- 2"x7,425lb strength polyester
- Zinc plated stamped D-ring
- Loop end cinch
- Inspection/serial no. label
- English/Spanish manual
- USA mfg. on request
- ANSI Z359.18-17
- CSA Z259.15.22

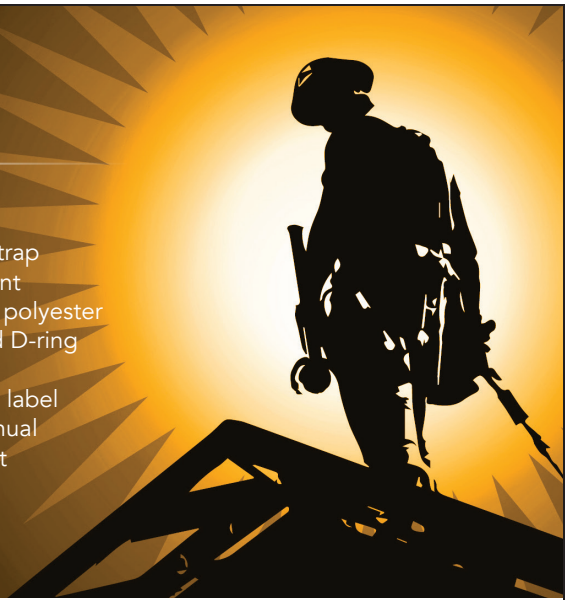

**No.6052-D**  
60"

**No.6051-D**  
48"



**No.6050-D**  
36"



Cinch Style



Bulk Box

Retail Package



## Ordering Information

Part No.	Length	Package	Pcs	wt.
6050-D	36"	Retail Package	1	.75lb
6051-D	48"			1.0lb
6052-D	60"			1.25lb
6053-D	72"			1.5lb
6050-DB	36"	Bulk Box	50	34lb
6051-DB	48"			38lb
6052-DB	60"			44lb
6053-DB	72"			48lb



**Super Anchor Safety**

17731 147th Street SE Monroe, WA 98272, USA  
www.superanchor.com 1-855-301-4575