



SRL-USA Inspection Worksheet: 12-09-2013

Use Worksheet reference numbers with "Inspection Report" Form
Remove any SRL connectors before returning to SAS Factory

Do not use for CSA marked SRL's

FORM
B

Fig. 1

- ① Casing Handle
- ② Casing Screws
- ③ Casing: Front Side
- ⑤ Specification Label "AA"



Fig. 2

- ④ Casing: Back Side
- ⑦ Warning Label "BB"
- ⑥ Embossed Marks
Model-Part N°
Serial N°
Lot DOM Y/M



Fig. 3

Original Specification Label "AA":

Model	Cable Length	Lot Date of Mfg. (DOM)	Serial N°
Class B-SRD Model/Part N° 2901k	Meets: ANSI Z359.1 CSA Z259.2.2: Type 2 OSHA 1926:502 50ft (15m)	Max. Free fall length: 6ft (1.8m) Connector: 3600lb gate	Lot mfg. Y/M Serial N° Service Date

Specification of use: Single person fall arrest use with overhead anchorage or sloped surfaces. May be connected to a Horizontal line as PPE attachment only.

Date of mfg./service
Date SRL shipped from factory
or date last service was performed

Fig. 4

Service/Replacement Label "AA":

Class B-SRD Model/Part N° 2901k	Meets: ANSI Z359.1 CSA Z259.2.2: Type 2 OSHA 1926:502 50ft (15m)	Max. Free fall length: 6ft (1.8m) Connector: 3600lb gate	Lot mfg. Y/M Serial N° Service Date
--	--	---	---

Specification of use: Single person fall arrest use with overhead anchorage or sloped surfaces. May be connected to a Horizontal line as PPE attachment only.

Date of Factory Service
or Date of Inspection by "Competent Person"

- ⑧ Spring Guide
- ⑨ Damper Spring
- ⑩ Damper Cap
- ⑪ Damper Ball
- ⑫ Ferrule 1
- ⑬ Ferrule 2
- ⑭ Eye Thimble
- ⑮ Wire Rope (Cable)
- ⑯ Fall Indicator: Not Deployed
- ⑰ Swivel
- ⑱ SH Lock Lever
- ⑲ SH Gate
- ⑳ SH Lock Rivets
- ㉑ Gate Rivet
- ㉒ SH Gate
- ㉓ Hook End

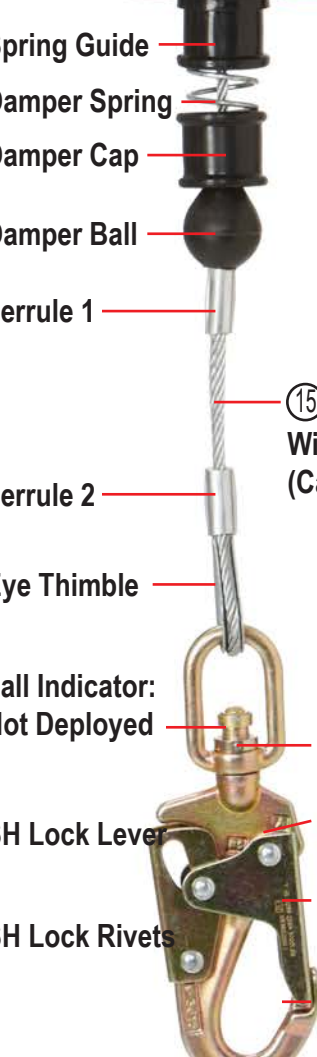


Fig. 5

- ⑯ Fall Indicator: Red = Deployed

