


Horizontal Lifeline Kits

No.1323 20ft 30° Horizontal Lifeline System Mfg. at Super Anchor Safety Factory in Monroe, WA USA

Specified for use on wood framed structures. Installs with factory supplied 3" re-usable hex head wood screws or duplex nails.

Compliance
OSHA 1926:502
3rd Party Certified Engineering

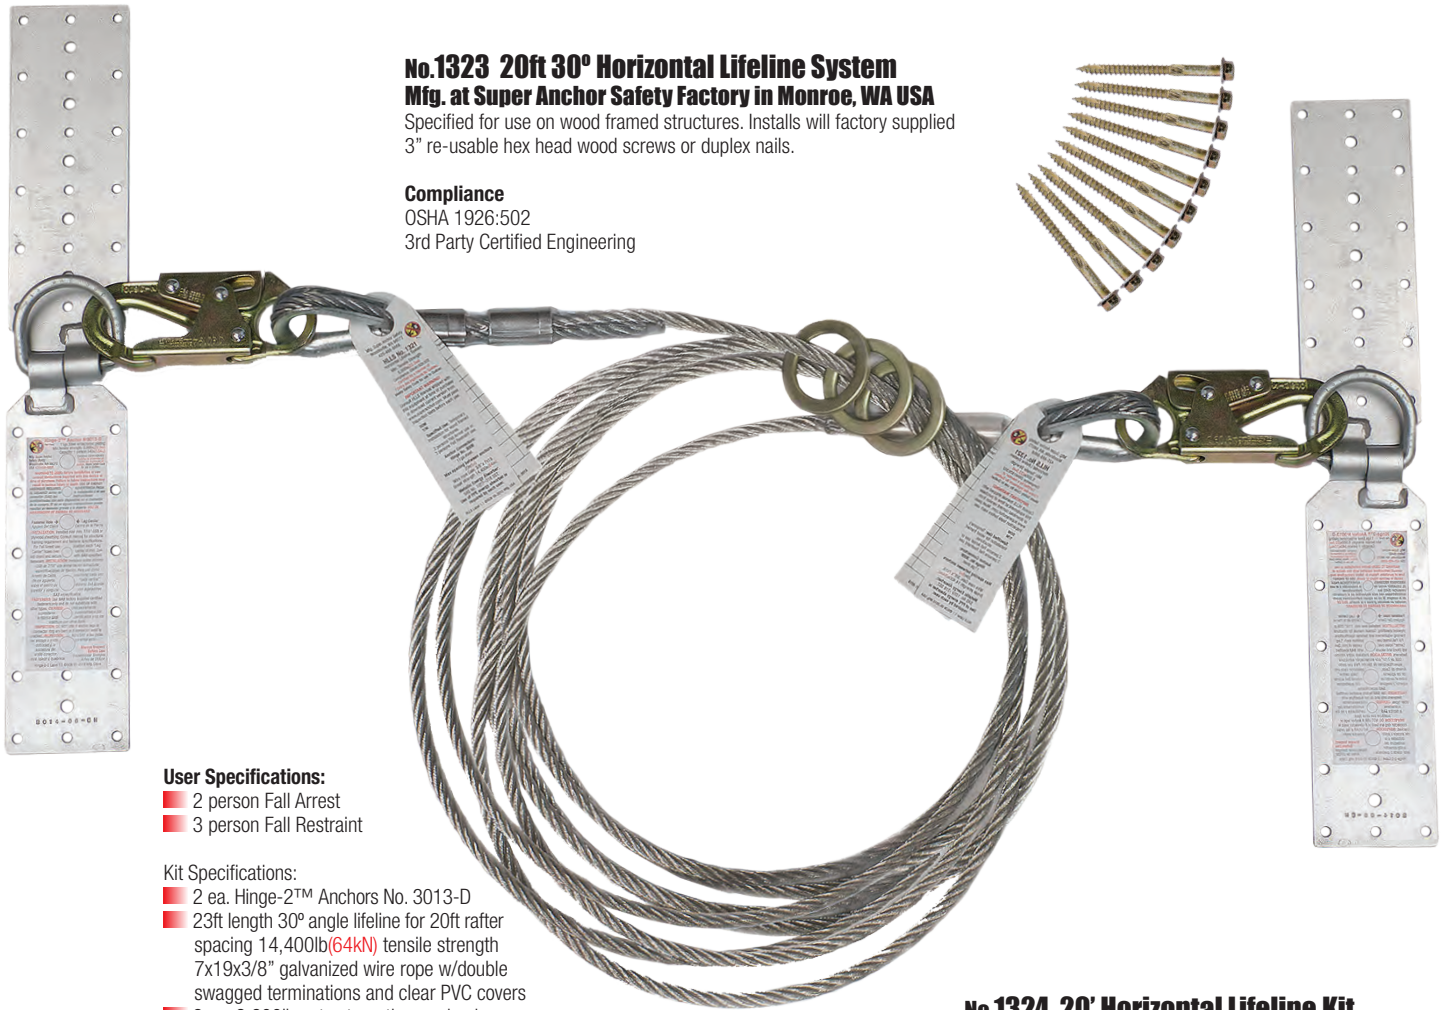

User Specifications:

- 2 person Fall Arrest
- 3 person Fall Restraint

Kit Specifications:

- 2 ea. Hinge-2™ Anchors No. 3013-D
- 23ft length 30° angle lifeline for 20ft rafter spacing 14,400lb(64kN) tensile strength 7x19x3/8" galvanized wire rope w/double swagged terminations and clear PVC covers
- 2 ea. 3,600lb gate strength snap hooks
- 3 ea. Connector rings
- 10 ea. 3" WS Hex Head re-usable wood screws
Hex driver not included.
- English/Spanish Instructions Product ID and Inspection labels

Pkg, Wt. 13 lb

No.1324 20' Horizontal Lifeline Kit

Kit No.1323 supplied with a large size cargo bag for easy transport and storage.

Pkg, Wt. 15 lb

