


Lanyards & Connector Options

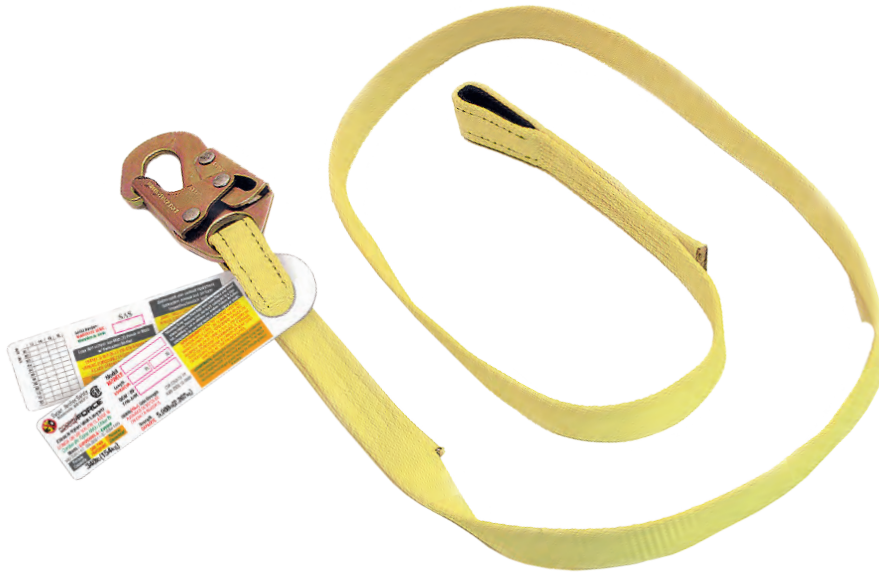

No. 6014 72" Web Lanyard with Snap Hook and Loop End

1" wide x 72" (1.8M) length nylon.
 Webbing Tensile Strength: 9,800lb(44.5kN)
 3,600lb(16kN) Gate Strength Snap hook
 Single Person Use: Max.wt.340lb(154kg)
 English/Spanish Instruction label
 Inspection label
 Date of mfg. and serial no.
 Pkg. Wt. 1.1 lb

Compliance:
 OSHA 1926.502/ANSI-Z359.1-07




No. 6002 18" Web Lanyard with Snap Hook and Loop End

1" wide x 18" (457mm) length nylon.
 Webbing Tensile Strength: 7,200lb(32.6kN)
 3,600lb(16kN) Gate Strength Snap hook
 Single Person Use: Max.wt.340lb(154kg)
 English/Spanish Instruction label
 Inspection label
 Date of mfg. and serial no.
 Pkg. Wt. 0.75 lb

Compliance:
 OSHA 1926.502/ANSI-Z359.1-07

No. 6017 72" Web Lanyard w/ Carabiner & Loop End

1" wide x 72" (1.8M) length nylon.
 Webbing Tensile Strength: 9,800lb(44.5kN)
 Aluminum Carabiner
 Min. Tensile Strength 5,000lb(23kN)
 Single Person Use: Max.wt.340lb(154kg)
 Date of mfg. and Serial Numbered
 English/Spanish Instruction labels
 Inspection Label
 Pkg. Wt. 0.75 lb

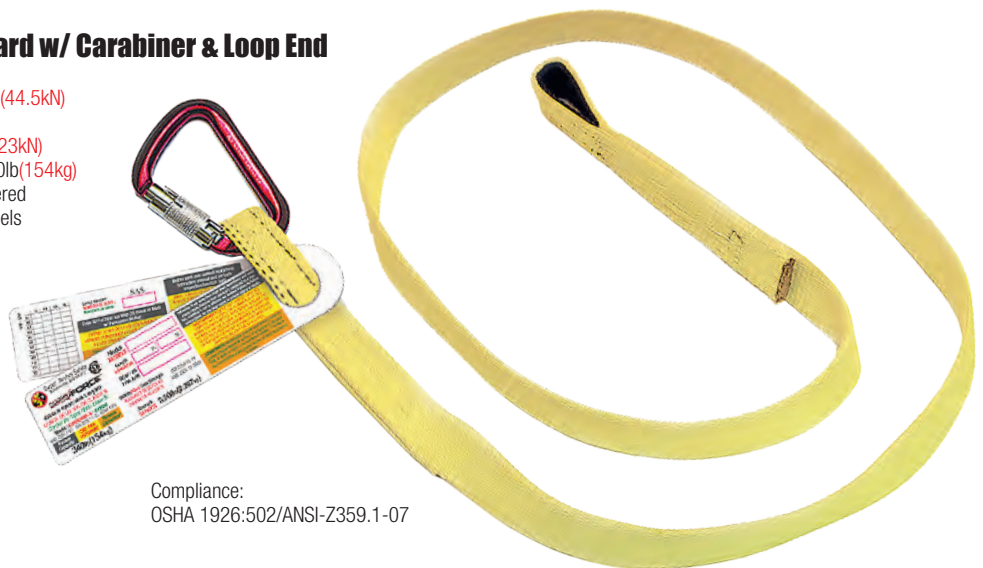

Compliance:
 OSHA 1926.502/ANSI-Z359.1-07