

Anchors • ARS Series Truss Plant


ARS Type-2™ ARS Anchor Kit

Super Anchor Safety worked with a major truss hardware manufacturer to design an anchor that could be installed during the truss fabrication. The ARS Type-2™ was developed to install easily with a cordless drill and single attachment bolt. Anchors are located onto the builders plans and then attached to the corresponding truss providing a one step operation to provide fall protection. Anchors are sold as complete kits with flashings and attachment bolt. Type-2 may also be used in post truss mfg. at the job site.

Specification of Use: Fall Arrest 1 person max. wt. 340lb

Compliance: OSHA 1926:502, 1910.66

ANSI Z359.1-07, A10.32-2012

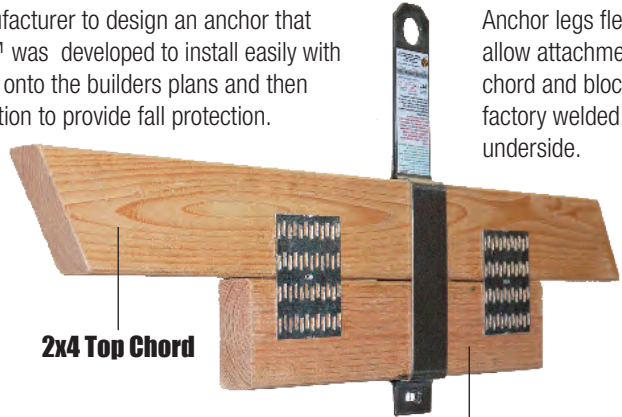

Anchor legs flex open to allow attachment to the top chord and blocking with the factory welded nut on the underside.

2x4 Top Chord

2x4x18" Blocking



Attachment bolt nut is factory welded to the anchor leg




Attachment bolt is installed from the top side w/5/16" nut driver



No. 1068 Type-2 Anchor Kit - Single Pack

- Type-2 anchor 14 gauge 430 stainless steel
- Grade 8 attachment bolt
- Rated for fall arrest
- PVC Flashing base w/black stem cover + zip tie
- English/Spanish labels and manuals
- Specify quantity when ordering

Pkg, Wt. 2.5lbs
Master Pack Qty: 9

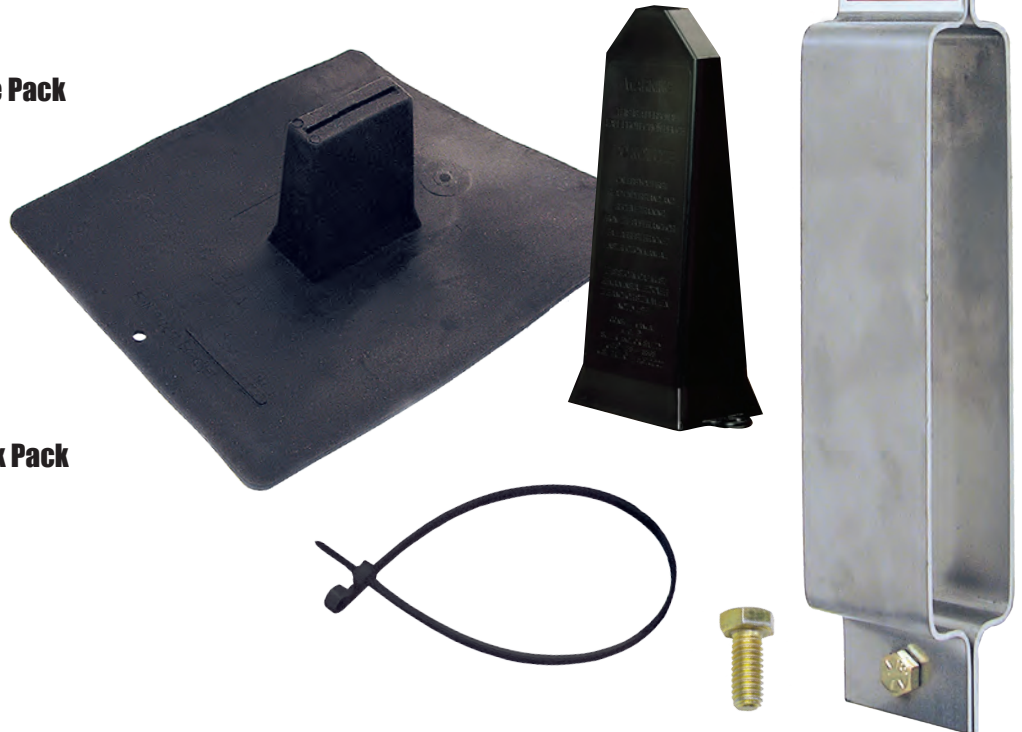

No. 1068-B Type-2 Anchor Kit - Bulk Pack

- Type-2 anchors 14 gauge 430 stainless steel
- Grade 8 attachment bolts
- 20ea. English/Spanish labels and manuals
- Specify quantity when ordering
- Order flashing components separately

Master Pack Qty: 9