

Connectors • Carabiners & Snap Hooks

Connectors

Snap hooks, rebar hooks, carabiners and D-rings used for fall protection are the primary link between a component and the anchorage point. For that reason, SAS supplies only the highest quality connectors certified to comply with ANSI Z359.12-09 and CSA Z259.12-11. All connectors have a minimum tensile strength of 5,000lb(23kN) and 3,600lb(16kN) gate strengths. CSA certified connectors display the CSA mark.

Connectors may be ordered separately or specified as a connector for custom assemblies.

Aluminum Carabiners

Anodized finish with twist lock gates that requires two functions to open. Preferred by most users because of their lighter weight compared to steel carabiners.

Steel Carabiners


Zinc plated finish with twist lock gates that requires two functions to open. Steel carabiners have a higher tensile strength rating and smaller diameter body than aluminum.

No. 5001Z Steel Auto-Lock™ Carabiner

Gate Strength	Proof Load	Min. Breaking	Net Wt.
3,600lb (16kN)	3,600lb	5,000lb (23kN)	8.8oz

- 25kN Tensile Strength
- Zinc Plated
- 19mm Gate Opening

Compliance:
OSHA 1926:502 ANSI-Z359.12-09/
CSA-Z259.12-11

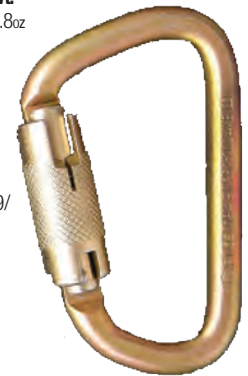

No. 5000Z Aluminum Auto-Lock Captive Carabiner

Gate Strength	Proof Load	Min. Breaking	Net Wt.
3,600lb (16kN)	3,600lb	5,000lb (23kN)	5.3oz

- 23kN Tensile Strength
- Black Anodized Finish
- 18.5mm Gate Opening

Compliance:
OSHA 1926:502 ANSI-Z359.12-09/
CSA-Z259.12-11



No. 5006Z Aluminum Auto-Lock Carabiner

Gate Strength	Proof Load	Min. Breaking	Net Wt.
3,600lb (16kN)	3,600lb	5,000lb (23kN)	5.3oz

- 24kN Tensile Strength
- Red Anodized finish
- 22mm Gate Opening

Compliance:
OSHA 1926:502 ANSI-Z359.12-09/
CSA-Z259.12-11



No. 5005Z Steel Double Locking Snap Hook

Gate Strength	Proof Load	Min. Breaking	Net Wt.
3,600lb (16kN)	3,600lb	5,000lb (23kN)	13.8oz

- 23kN Tensile Strength
- Forged Steel Zinc Plated
- 21mm Gate Opening

Compliance:
OSHA 1926:502 ANSI-Z359.12-09/
CSA-Z259.12-11



No. 5008Z Double Locking Rebar Hook Snap Hook

Gate Strength	Proof Load	Min. Breaking	Net Wt.
3,600lb (16kN)	3,600lb	5,000lb (23kN)	27.8oz

- 23kN Tensile Strength
- Forged Steel Zinc Plated
- 65mm (2.55") Gate Opening

Compliance:
OSHA 1926:502 ANSI-Z359.12-09/
CSA-Z259.12-11

