

# RS™ Series Anchors

## DESIGN SPECIFICATIONS

### Standard Models:

- 430 stainless steel w/ Dacromet or zinc plated D-ring
- 3/16" d. fastener holes

### All Models:

- 5,000lb min. tensile strength
- 3,600lb proof loaded D-ring
- Permanent YYYY-MM date of mfg.
- Single person fall arrest or work positioning w/max user wt. 340lb

### 100% Dacromet Models

- 17 gauge Dacromet coated steel
- Forged D-Ring
- Dual size fastener holes

### Dual Hole Sizes

- 3/16" d. holes for nails and #12 screws
- 5/16" holes for long length Headlock screws specified for use with metal decking and insulation panels. See fastener section.

### RS-Anchor Dimensions

**RS-20W  
No. 2816W**



90° Bend  
for wall mount



Permanent data of  
mfg. stamp marks

**RS-10™  
No. 2813**



2-1/2"  
(63mm)

8-1/2"  
(216mm)

2.0"  
(50mm)

**Retro-Fit™  
No. 2815**




13.0"  
(330mm)

**RS-20™  
No. 2816**



17-1/2"  
(445mm)

**Tile Retro™  
No. 2815T**

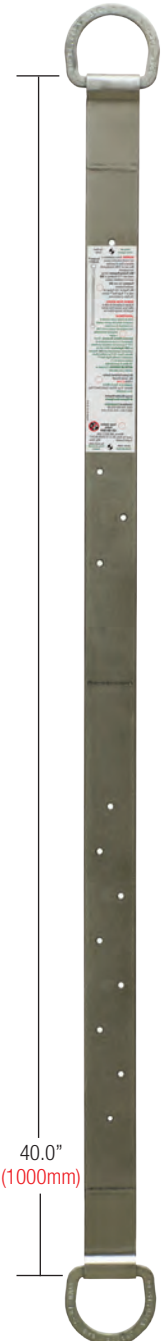


40.0"  
(1000mm)



### Installation over Top Chords

Anchors are centered over top  
chords and installed with 3"  
length nails or screws

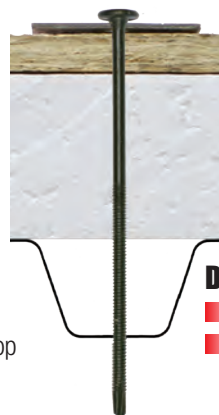

### Dual Hole Sizes

- 3/16" d. holes for nails and #12 screws
- 5/16" holes for long length Headlock screws specified for use with metal decking and insulation panels. See fastener section.