

Anchors • Tie-off Straps



No. 6050D-6053D Value™ Tie-Off Strap D-Ring + Loop End

Material: 2" wide Polyester 10,000lb min. breaking strength Cinch style tie-off strap
 English/French/Spanish Label and Instruction Manual

Compliance: OSHA 926:502/CSA Z259.11-05 ANSI Z359.1-07/A10.32-2012

D-Ring + Loop End

Length	Part No.	Wt.
36"	6050D	1lb
48"	6051D	1.25lb
60"	6052D	1.25lb
72"	6053D	1.5lb

Extra Heavy Duty Tie-Off Straps

- 2" wide Nylon webbing
- Min. breaking strength 19,500 lb
- Large Slotted D-ring zinc plated
- Cinch design wraps around wood or steel structures
- Interior wear pads for long service life
- English/French/Spanish label and inspection tag.



Large D-Ring + Small D-Ring

Length	Part No.	Wt.
36"	6031	1.5lb
72"	6032	1.75lb

Large D-Ring + Loop End

Length	Part No.	Wt.
36"	6015	1.25 lb
72"	6016	1.5 lb

Mfg. by
Super Anchor Safety
 Monroe, WA. USA

Compliance: OSHA 1925:502/CSA Z259.11-05 ANSI Z359.1-07/A10.32-2012



Custom Tie-Off Strap

Our factory at Monroe WA, USA will custom fabricate web lanyards to your specified length and type of terminations.

- Easy to design using our Custom Tie-Off Strap Worksheet on our website
- Webbing cost per inch based on the Tie-Off strap service length
- All connectors are Class 1 min. tensile strength 5,000lb (23kN)
- Standard Finished lengths 24-36-48-60-72 [inches] or specify longer lengths

Compliance: OSHA 1926:502 CSA Z259.11-05/ ANSI Z359.1-07/A10.32-2012

Nylon Webbing Specifications:

Part No	Min.	Tensile
6041	Connector Charge	
6042	Custom Length	
6043	Webbing Charge per Inch	


Custom Tie-Off Strap Connector Options




Large D-Ring No. 5004



Flat D-Ring No. 5012




Small D-Ring No. 500



Loop End Specify "B" End

"A" End Connector

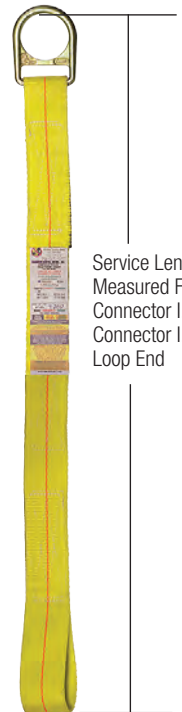

Service Length Measured From Connector I.D. to Connector I.D. or Loop End

"B" End Connector