


# Commercial Roof Anchors • CRA

## CRA Loop Top Anchor

Specified for use as a single person anchor point, window washing tie-off and horizontal lifeline systems. Anchors are 3rd party engineered and specified for installation with mechanical fasteners, bolt attachment, concrete embedment or field welded.

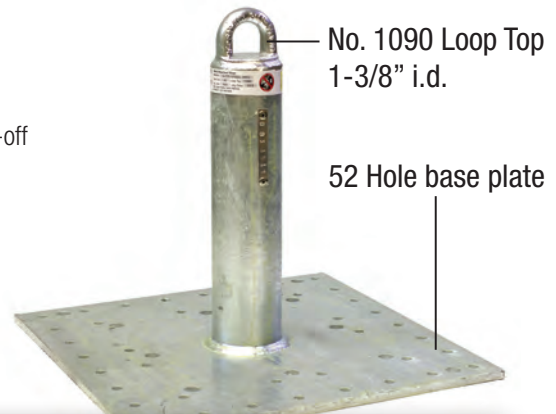

Use Rating	Riser Height	Part Name	Material				SAS Part No.	Top Fixture		16x16 Base approx. wt/lb
			Sch	O.D.	Base	Type		No.	Type	
Rated For Window Washing  1 Person PPE Anchor  HLL End and Intermediate Anchors	8 ▲ □	CRA-8W	40	3.0"	3/8"	▲ HDG	1035-W	1090	Q235	36
						304sst	1035-WS	1090-S	316sst	
						316sst	1035-WSX			
	12 ▲ □	CRA-12W	40	3.0"	3/8"	▲ HDG	1032-W	1090	Q235	41
						304sst	1032-WS	1090-S	316sst	
						316sst	1032-WSX			
	18 ▲ □	CRA-18W	40	3.0"	3/8"	▲ HDG	1033-W	1090	Q235	46
						304sst	1033-WS	1090-S	316sst	
						316sst	1033-WSX			
	24 ▲ ▲	CRA-24W	80	3.0"	5/8"	▲ HDG	1042-W	1090	Q235	64
						304sst	1042-WS	1090-S	316sst	
						316sst	1042-WSX			
30 ▲ ▲	CRA-30W	80	4.5"	7/8"	HDG	1025-W	1090	Q235	81	
					304sst	1025-WS	1090-S	316sst		
					316sst	1025-WSX				
36 ▲ ▲	CRA-36W	80	4.5"	1.0"	HDG	1026-W	1090	Q235	95	
					304sst	1026-WS	1090-S	316sst		
					316sst	1026-WSX				
30 ▲ ▲	CRA-30W2 2.0" i.d. Loop Top	80	4.5"	7/8"	HDG	1025-W2	1093	Q345	81	
					304sst	1025-W2S	1093-S	316sst		
					316sst	1025-W2SX				
36 ▲ ▲	CRA-36W2 2.0" i.d. Loop Top	80	4.5"	1.0"	HDG	1026-W2	1093	Q345	95	
					304sst	1026-W2S	1093-S	316sst		
					316sst	1026-W2SX				
1 Person PPE Anchor HLL End and Intermediate Anchors	30 ▲	CRA-30	80	3.0"	5/8"	HDG	1025-G	1090	Q235	66
						304sst	1025-S	1090-S	316sst	
						316sst	1025-SX			
	36 ▲	CRA-36	80	3.0"	3/4"	HDG	1026-G	1090	Q235	79
						304sst	1026-S	1090-S	316sst	
						316sst	1048-SX			

- ▲ Stock Part.
- ▲ Max proof load 2,500lb. Bolt attached concrete embedment or field weld.
- #14 screw, bolt attached, concrete embedment, or field weld.
- ▲ Bolt attached, concrete embedment or field weld.

12-21-2018 ©SCN [R]

### Base Plate Fastener Holes:

CRA Mode	Fastener Hole Specs	
	3/8"	9/16"
8-12-18	40	12
24	N/A	12
30-36	N/A	▲ 4-8-12

▲ Specify at time of ordering