

Commercial Roof Anchors • CRZ Z-Purlin

CRZ Z-Purlin Roof Anchor Pass Through Tops

Designed for use with 3/8" wire rope horizontal lifeline systems (HLLS), pass through tops (PT) allow a connector ring to move from one side of the PT top to the other side. This feature provides a 100% tie-off along the entire length of the HLLS. PT tops are oriented for the direction of the HLL using models AP or BP and require CRZ A or B models to be used as HLL end anchors. PT tops are not specified for personal fall protection (PPE) anchors.

- Hot Dip Galvanized, 304 or 316 stainless steel
- 3.0" Riser o.d. min. wall thickness 0.203
- *SST hex screw vent hole plug
- SAS exclusive 1pc cast loop top fixtures
- Includes No.2048 18-2sst attachment bolts
- Custom size risers and base plates for wood beams
- Pass Through orientation for HLL installations
- Pre-drilled No. 2049 blocking optional
- Master Flash No. 2050 optional
- 5,000lb min. tensile strength

CRZ-AP Pass Through Top Specifications:

Riser Height	Part Name	Part No.	Material Type	Top Fixture Type	Wt.
6.0" Sch 40 2.5"Pipe	CRZ-AP	1126-AP	HDG	1091 Steel	15lb
		1126-APS	304sst	1091-S 316sst	
		1126-APSX	316sst	1091 S	



CRZ-BP Specifications:

Riser Height	Part Name	Part No.	Material Type	Top Fixture Type	Wt.
6.0" Sch 40 2.5"Pipe	CRZ-BP	1126-BP	HDG	1091 Steel	15lb
		1126-BPS	304sst	1091-S 316sst	
		1126-BPSX	316sst	1091 S	

Note: Stock models maximum top flange width 3-3/4" Minimum purlin web depth 6.0" *A min. 3/8"d. vent hole near the riser top are required for the HDG process.

CRZ Accessories

Part No.	Part Name	Material	wt/lb
2048	Replacement Bolt Pack 2pc 3/8"x5" w/lock nut 2pc 3/8"x1-1/4" w/lock nut	18-2sst	.5
2049	Z-Purlin Wood Block 2pc 1-1/2" WS Screws	Hem/Fir 4x5x6	2
2050	Master Flash 10x10 1pc 3" sst pipe clamp 12pc SD Tec Screws	35yr Black EPDM	1

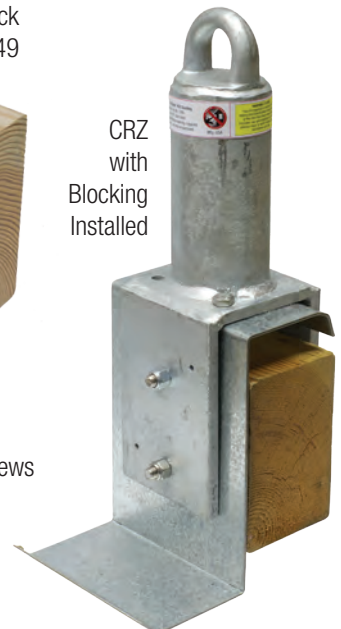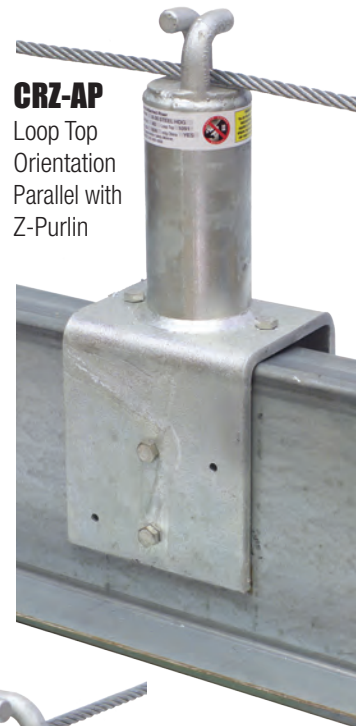

Master Flash
No. 2050



65