

Commercial Roof Anchors • Vault Anchors

Vault Model CMU/CCMU

An SAS exclusive Vault anchor that is specifically designed for 8x8x16 CMU block walls. The bolt holes are spaced to fit the CMU center cavities and may be bolt through installed using a backer plate or poured in place concrete embedment. Model CCMU is CAL-OSHA compliant.


- Specified for Window Washing anchors PPE and Horizontal Lifeline Systems
- 316sst cast loop tops
- Drain Hole plugged w/1/2" d.sst hex head screw
- Hot dip galvanized, 304 or 316 stainless steel or thermoplastic waterproof coating.

Type CMU Compliance: IWCA-14.1, OSHA 1910.140

Type CCMU Compliance:

CAL-OSHA Title 8

Engineering: 3rd party engineering by DH Glabe

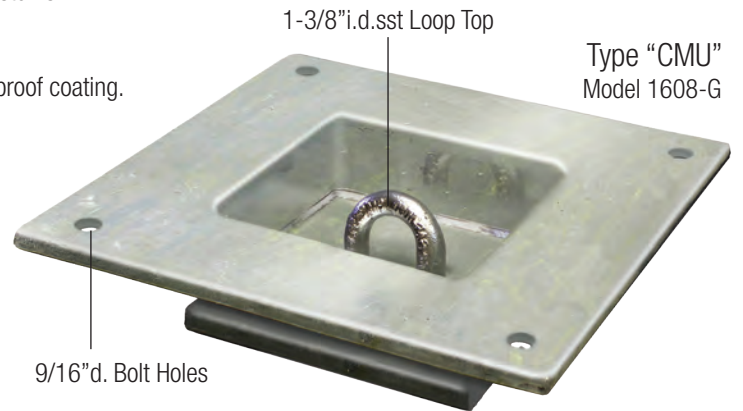

Use Rating	Part Name	Attachment Specification	Material Type	SAS Part No.	Top Fixture		Approx wt/lb
					No.	Type	
Window Washing 1 Person PPE Anchor	Vault CMU	Bolt Attached w/1/2" d. bolts	Yellow TP	1608-TP	1090-S	316sst	28
			HDG	1608-G			
			304sst	1608-S			
			316sst	1608-SX			
Type CCMU Meets CAL-OSHA Requirements							
HLL End Anchors	Vault CCMU	Bolt Attached w/ 1/2" d. Bolts	Yellow TP	1609-TP	1093-S	316sst	28
			HDG	1609-G			
			304sst	1609-S			
			316sst	1609-SX			



TP = Yellow Thermoplastic Coating. HDG=Hot Dip Galvanized

Notes:

Type "CMU/CCMU" anchors include 1/2"x 9.0" 18-2sst bolts flat washers and lock nuts specified for 8x8x16 CMU block. Backer plate no. 1610 is required.

Max proof load 5,000lb.

CMU/CCMU Vault Backer Plates

Model	Part No.	Finish	Bolt Holes	Dimension	wt/lb
Vault-BP 1610-R		Raw	4ea 9/16" d	14x14x3/8"	20
Vault-BP 1610-TP		Yellow TP			
Vault-BP 1610-G		HDG			
Vault-BP 1610-S		304sst			
Vault-BP 1610-SX		316sst			

