

Commercial Anchors - Loop Top Fixtures

Stud Bolt Loop Top and Pass Through Fixtures

Stud Bolt Attached Loop Tops are not specified for window washing.

Material Type:

5,000lb Minimum Tensile Strength

R = Raw Un-coated A-36 Steel

G/HDG = ASTM 123 Hot Dip Galvanized

S = 316 Grade Stainless Steel

Stud Size: 2"x5/8" - 11

No.1090-SBS



Supplied with Lock Nut
and Flat Washer



Stamp Marks

Date of Mfg.


Part No.

Material type


Strength Rating

ANSI Compliance

No.1090-SBS

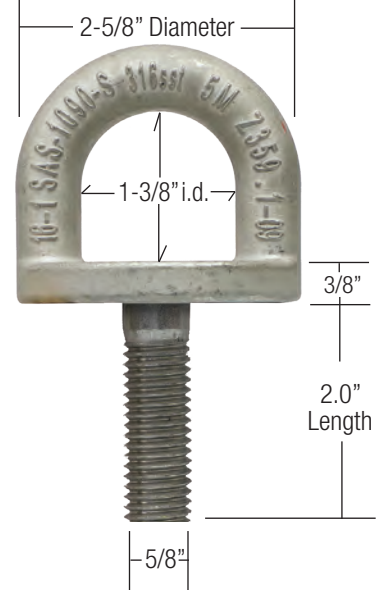

No.1091-GBS Pass Through Top

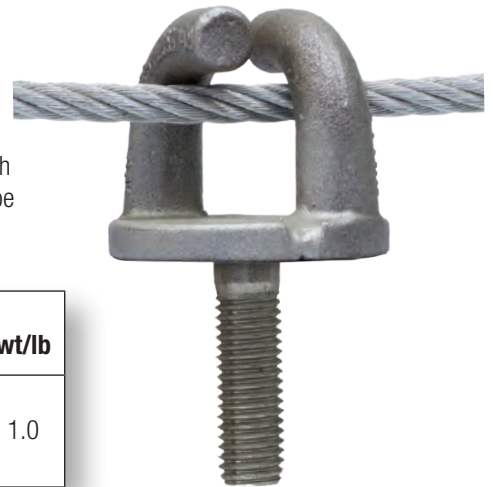

Specified for use with
3/8" d. HLL Wire Rope

Loop Top No.1090 w/2.0" Stud Bolt

Use Rating	Part Name	Bolt Specification	Material Type	SAS Part No.	Specifications		wt/lb
					I.D.	Connectors	
PPE Tie Off or HLL Ends	SAS 1090	5/8" Grade 5	Raw	1090-RBS	1-3/8"	Snap hooks	1.0
			HDG	1090-GBS		Carabiners	
	SAS 1090-S	5/8" sst	316sst	1090-SBS		Rebar Hooks	

Note: Custom length studs available upon request. Maximum length 6.0"

Pass Through Top No.1091 w/2.0" Stud Bolt for HLL Use Only

Use Rating	Part Name	Bolt Specification	Material Type	SAS Part No.	Specifications		wt/lb
					I.D.	Connectors	
HLL Intermediate Anchors	SAS 1091	5/8" Grade 5	Raw	1091-RBS	1-3/8"	N/A	1.0
			HDG	1091-GBS		3/8" Wire Rope Only	
	SAS 1091-S	5/8" sst	316sst	1091-SBS			

Includes
PID Label and
Inspection Label

72

