

# Commercial Anchors • Loop Top Fixtures

## Field Welded CAL-OSHA Loop Top Fixtures

### Material Type:

10,000lb Minimum Tensile Strength

R = Raw Un-coated A-36 Steel

G/HDG = ASTM 123 Hot Dip Galvanized

S = 316 Grade Stainless Steel

△ Permanent label packs are attached with a 1/4" sst hex bolt.

▲ Provisional label packs must be Removed prior to welding.


### No.1093-R

Field Welded

△ Shown with Optional Permanent Label Pack

### No.1093-R

Field Welded

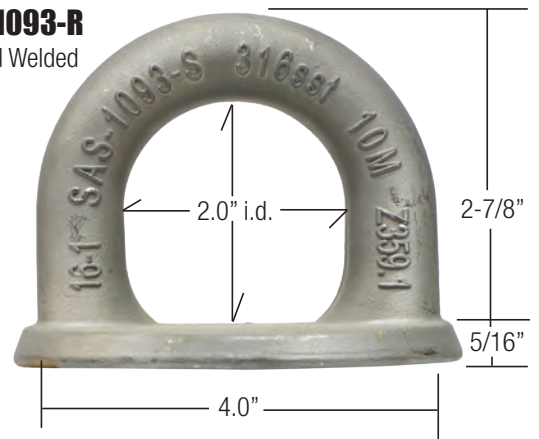

### Stamp Marks

Date of Mfg.

Part No.

Material type

Strength Rating

ANSI Compliance

PID Label  
2 Inspection  
Labels



### No.1093-S

▲ Shown with Provisional Label Pack attached

## CAL-OSHA Field Weld Loop Top No.1093

Use Rating	Part Name	Attachment Specification	Material Type	SAS Part No.	Specifications		wt/lb
					I.D.	Connectors	
PPE Tie Off	SAS 1093	Field Weld	Raw	1093-R	2.0"	Carabiners Rebar Hooks	2.7
			HDG	1093-G			
			316sst	1093-S			

Note: No. 1093 loop width is not compatible with standard size snap hooks.

