


Commercial Anchors • Loop Top Fixtures

Bolt Through CAL-OSHA Loop Top Fixtures

Material Type:

10,000lb Minimum Tensile Strength
 Bolt rated for 5,000lb Minimum Tensile Strength
 R = Raw Un-coated A-36 Steel
 G/HDG = ASTM 123 Hot Dip Galvanized
 S = 316 Grade Stainless Steel
 PID and Inspection label included

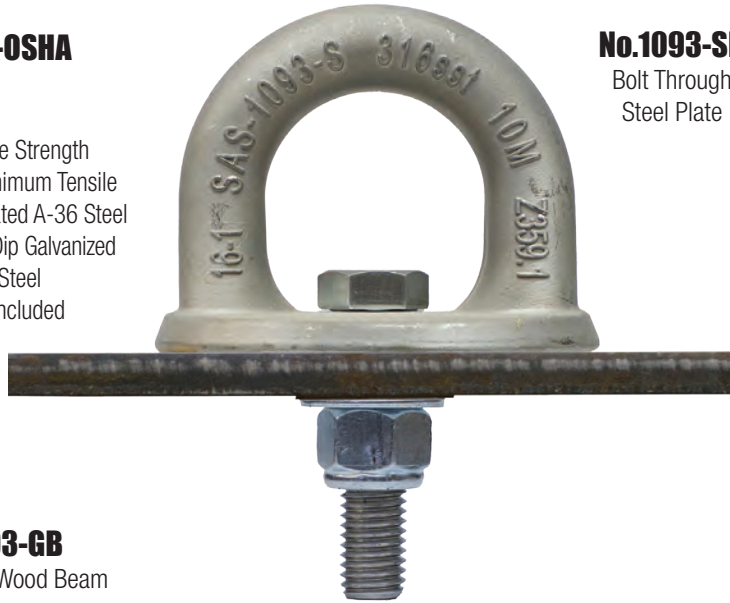

No.1093-SB

Bolt Through Steel Plate




Product I.D. (PID) label

Inspection Label

No.1093-GB

Bolt Through Wood Beam

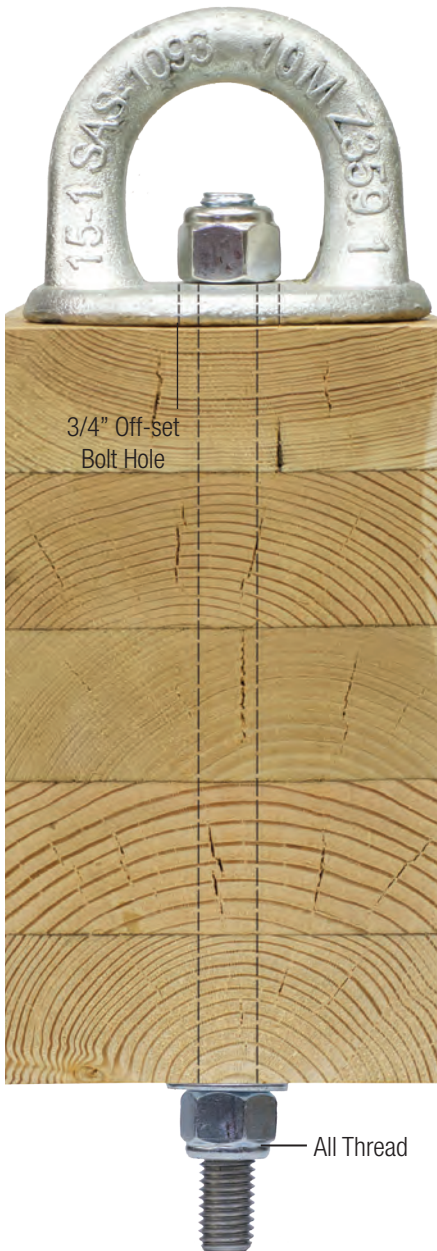

3/4" Off-set Bolt Hole

All Thread

CAL-OSHA Bolt Through Loop Top No.1093

Use Rating	Part Name	Attachment Specification	Material Type	SAS Part No.	Specifications		wt/lb
					I.D.	Connectors	
PPE Tie Off	SAS 1093	Bolt Through Attached	Raw	1093-RB	2.0"	Carabiners Rebar Hooks	2.7
	SAS 1093-S		HDG	1093-GB			
			316sst	1093-SB			

Note: No.1093 loop width is not compatible with standard size snap hooks.

5/8"-11 Attachment Bolt Specifications:


Grade 8	18-2 Stainless Steel	△ A-307 All Thread
---------	----------------------	--------------------

For SAS Factory supplied customer to specify bolt length at time of ordering

△ Not Available from SAS. Customer supplied



SAS supplied bolts include Lock Nut and Flat Washer

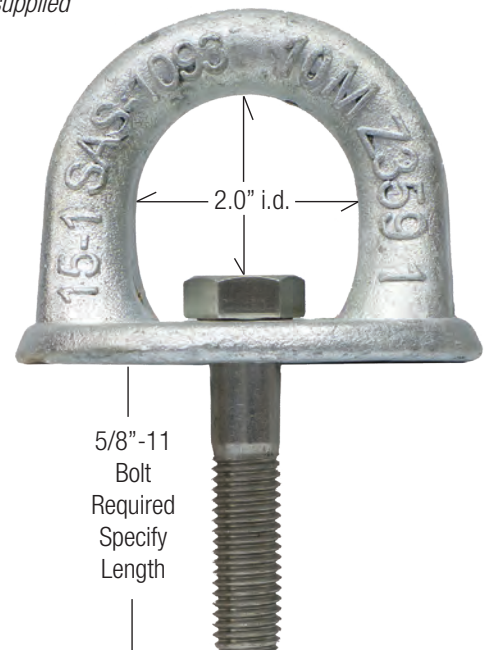

5/8"-11 Bolt Required Specify Length