


# Commercial Anchors • Loop Top Fixtures


## Stud Bolt CAL-OSHA Loop Top Fixtures

Stud Bolt Attached Loop Tops are not specified for window washing 10,000lb Minimum Tensile Strength Bolt rated for 5,000lb Minimum Tensile Strength  
 R = Raw Un-coated A-36 Steel  
 G/HDG = ASTM 123 Hot Dip Galvanized  
 S = 316 Grade Stainless Steel  
 Product I.D. (PID) label  
 Inspection Label

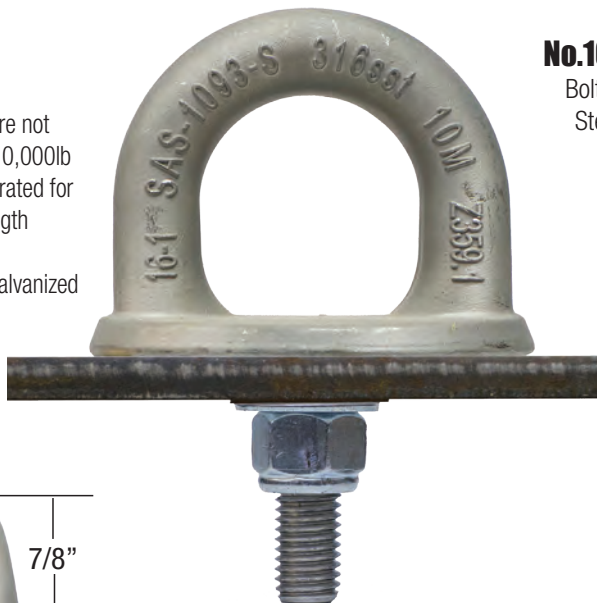

## No.1093-SBS

Bolt Through  
Steel Plate

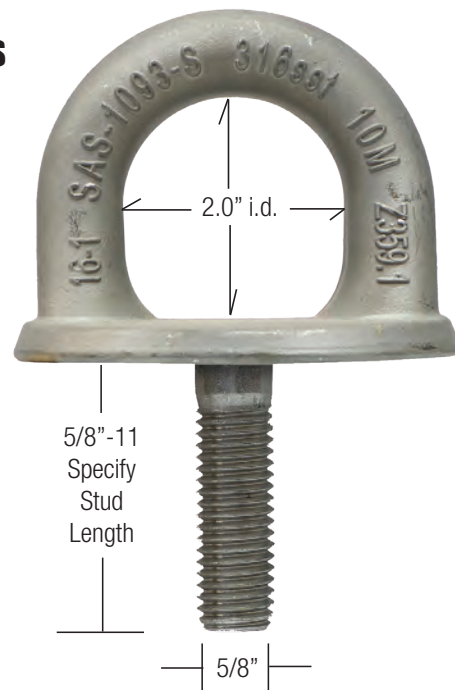


## CAL-OSHA Stud Bolt Loop Top No.1093

Use Rating	Part Name	Attachment Specification	Material Type	SAS Part No.	Specifications		wt/lb
					I.D.	Connectors	
PPE Tie Off	1093	Bolt Through	Raw	1093-RBS	2.0"	Carabiners Rebar Hooks	2.7
			HDG	1093-GBS			
	1093-S	Attached	316sst	1093-SBS			

Note: No.1093 loop width is not compatible with standard size snap hooks.  
 Maximum stud length 6.0"

## 5/8"-11 Stud and Bolt Specifications:

Grade 8	18-2 Stainless Steel or=
---------	--------------------------

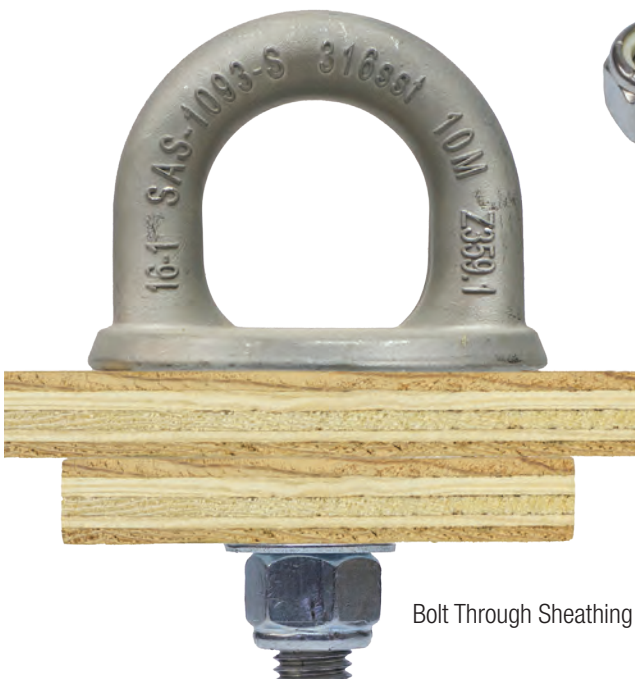

Bolt Through Sheathing



SAS supplied bolts include Lock Nut and Flat Washer

Includes  
PID Label and  
Inspection Label

