

Commercial Anchors • Horizontal Lifeline Kits



No.1050 | Horizontal Lifeline Kit

Use to adjust Horizontal Lifeline lengths and wire rope terminations.

- 1 ea. No.1058 HD galv. Turnbuckle w/ Stainless Steel attachment bolts
- 6 ea. No.1056 Cable Clamps and 2 ea. No. 1057 Rope thimbles

pkg, wt. 9 lb



No. 1050P | Horizontal Lifeline Kit

Use to adjust Horizontal Lifeline lengths and wire rope terminations.

- 1 ea. No.1058 HD galv. Turnbuckle w/ Stainless Steel attachment bolts
- 6 ea. No.1056 Cable Clamps and 2 ea. No. 1057 Rope thimbles
- 4 ea. No., 5010 Pass Through steel O-ring

pkg, wt. 10 lb

No.1059 | Metallic Energy Absorber

Use for Horizontal Line Systems.


Includes: 2 ea. 7/16x2-1/4" Stainless Steel attachment bolts

Material: 316 Stainless Steel 17" (432mm) Length

Features: Fall and Tension indicators Serial No. and DOM.

Max. Activation Force 771lb(3.5kN) Compatible with all CRA loop top fixtures.

pkg, wt. 6.3 lb

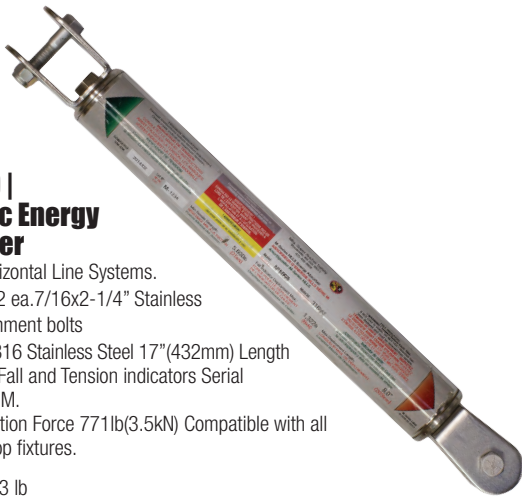


No.1051P | Horizontal Lifeline Kit

Use to adjust Horizontal Lifeline lengths and wire rope terminations.

- 2 ea. No.1058 HD galv. Turnbuckle w/ Stainless Steel attachment bolts
- 6 ea. No.1056 Cable Clamps and 2 ea. No. 1057 Rope thimbles
- 4 ea. No., 5010 Pass Through steel O-ring

pkg, wt. 20 lb

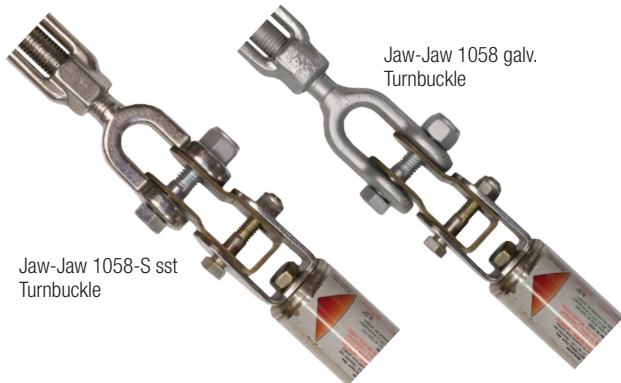

Jaw-Jaw 1058-S sst Turnbuckle

Jaw-Jaw 1058 galv. Turnbuckle



No.1053 | Coupler

Required to adapt 1058-1058S Turnbuckles to No.1059 Metallic energy absorber.

- 11ga. 304 sst. 5,000lb (23kN) min.tensile strength.
- Does not include attachment bolts.

Attachment bolts are furnished with Turnbuckles.