


Commercial Anchors • Horizontal Lifeline Kits

No. 1058 | Horizontal Lifeline (HLL) Turnbuckle

3/4x12.0" (19x300mm)
 Hot Dip Galvanized ASTM 1045 Steel 2ea. 9/16x3.0" sst attachment bolts/lock nuts.
 Working Load: 5,200lb (23.6kN)
 Min. Breaking Strength: 26,000lb (117kN)
 Max. Length adjustment: 11-1/2" (300mm)
 Product I.D. Label, DOM and inspection tag.
 Max. Extension: 34-1/2" (876mm)
 Closed Length: 23" (584mm)

pkg, wt. 7 lb

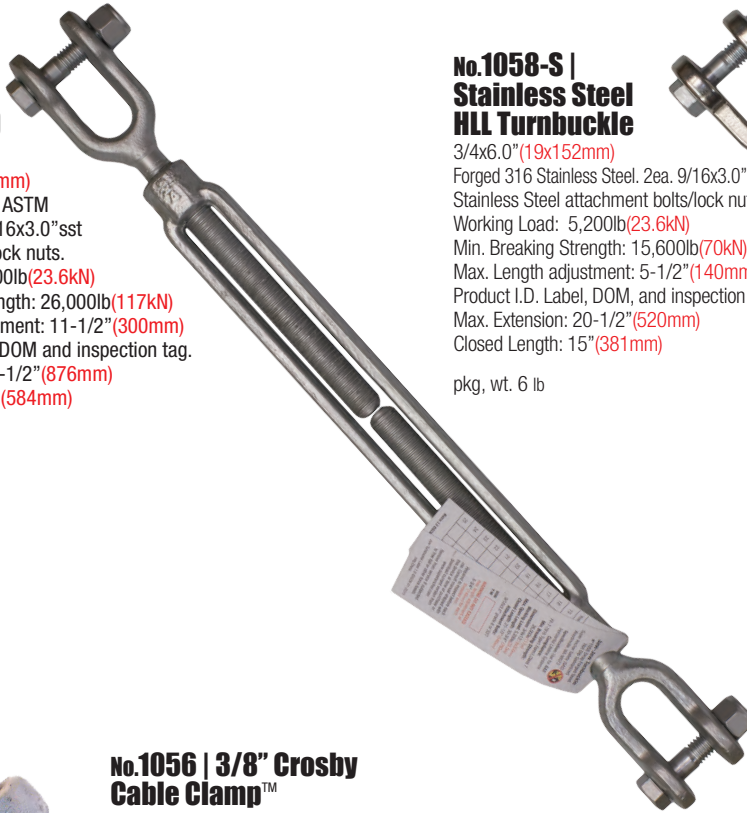

No.1058-S | Stainless Steel HLL Turnbuckle

3/4x6.0" (19x152mm)
 Forged 316 Stainless Steel. 2ea. 9/16x3.0" Stainless Steel attachment bolts/lock nuts.
 Working Load: 5,200lb (23.6kN)
 Min. Breaking Strength: 15,600lb (70kN)
 Max. Length adjustment: 5-1/2" (140mm)
 Product I.D. Label, DOM, and inspection tag.
 Max. Extension: 20-1/2" (520mm)
 Closed Length: 15" (381mm)


pkg, wt. 6 lb



No.1056 | 3/8" Crosby Cable Clamp™

1 ea. 3/8" cable clamp for our 3/8" lifeline.
 3 clamps minimum are needed per end
 Torque ratings in instruction manual

pkg, wt. 1.25 lb

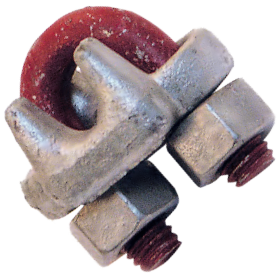

No.1057 | 3/8" Galvanized Thimble


Required for Wire rope terminations.
 Use for all types of 3/8" wire rope.

pkg, wt. 5 lb



No.1055 | 3/8" Galvanized Wire Rope

Type: 7x19 Wt/ft.: 2.43lb.
 Breaking Strength: 14,400lb (65kN)
 Use for Horizontal Lifeline Systems
 Sold by lineal ft.

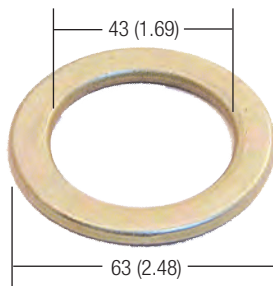

No. 5010 | "O" Ring

Specified use with Horizontal Lifelines and optional connector for 1" lanyard.

Stamped steel zinc plated
 Proof Load: 3,600 lb
 Breaking Strength: 5000lb (23kN)

pkg, wt. 0.25 lb

No.1055-S | 3/8" Stainless Steel Wire Rope