

Commercial Anchors • Horizontal Lifeline Parts

No. 1058 Galvanized Horizontal Lifeline Turnbuckle

3/4x12.0" (19x300mm) Hot Dip
Galvanized ASTM 1045 Steel 2ea. 9/16x3.0"
stainless steel attachment bolts/lock nuts.
Working Load: 5,200lb (23.6kN) Min. Breaking
Strength: 26,000lb (117kN) Max. Length adjustment:
11-1/2" (300mm) Product I.D. Label, DOM and inspection tag.
Max. Extension: 34-1/2" (876mm) Closed Length: 23" (584mm)
pkg, wt. 7 lb



No. 1058-S Stainless Steel Horizontal Lifeline Turnbuckle

3/4x6.0" (19x152mm) Forged 316 Stainless Steel.
2ea. 9/16x3.0" Stainless Steel attachment
bolts/lock nuts. Working Load: 5,200lb (23.6kN)
Min. Breaking Strength: 15,600lb (70kN)
Max. Length adjustment: 5-1/2" (140mm)
Product I.D. Label, DOM, and inspection tag.
Max. Extension: 20-1/2" (520mm) Closed Length: 15" (381mm)
pkg, wt. 6 lb



No. 1059 Metallic Energy Absorber


Use for Horizontal Line Systems.

Includes: 2 ea. 7/16x2-1/4" Stainless
Steel attachment bolts

Material: 316 Stainless Steel 17" (432mm) Length

Features: Fall and Tension indicators Serial
Number and DOM.

Max. Activation Force 771lb (3.5kN) Compatible with
all CRA loop top fixtures.
pkg, wt. 6.3 lb

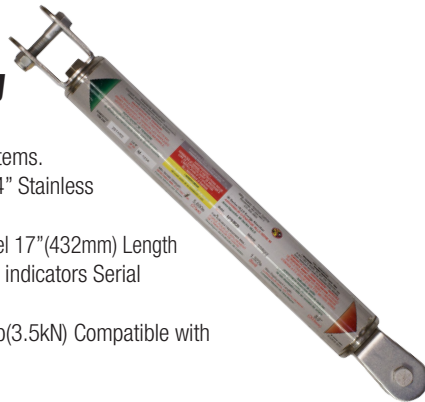

No. 1059A Metallic Energy Absorber with 2 Snap Hooks


Use for Horizontal Line Systems.

Includes: 2 ea. 7/16x2-1/4" Stainless
Steel attachment bolts

Material: 316 Stainless Steel 17" (432mm) Length


Features: Fall and Tension indicators Serial
Number and DOM.

Max. Activation Force 771lb (3.5kN) Compatible with
all CRA loop top fixtures.
pkg, wt. 6.3 lb




No. 1056 3/8" Crosby Galvanized Cable Clamp™

1 ea. 3/8" cable clamp for our 3/8" lifeline.
3 clamps minimum are needed per end
Torque ratings in instruction manual
pkg, wt. 1.25 lb



No. 1056S 3/8" Crosby Stainless Steel Cable Clamp™



No. 5010 "O" Ring

Specified use with Horizontal Lifelines
and optional connector for 1" lanyard.

Stamped steel zinc plated
Proof Load: 3,600 lb
Breaking Strength: 5000lb (23kN)
pkg, wt. 0.25 lb



No. 1053 Coupler

Required to adapt 1058-1058S Turnbuckles
to No. 1059 Metallic energy absorber.

11ga. 304 sst. 5,000lb (23kN) min. tensile strength.
Does not include attachment bolts.



Attachment bolts are furnished with Turnbuckles.



No. 1057 3/8" Galvanized Thimble

Required for Wire rope terminations.
Use for all types of 3/8" wire rope.
pkg, wt. 5 lb

No. 1057S 3/8" Stainless Steel Thimble