



# SUPER ANCHOR SAFETY®

## SideWinder3™ SRL Addendum Instruction/Specification Manual 2020

ENGLISH  
VERSION

**!WARNING TO USER!**  
You are required to read and use the Instruction/ Specification manual supplied at the time this device was shipped. Improper use and installation can result in serious injury or death. Follow inspection requirements before each use.

### Addendum Notice!

Use of SideWinder3 requires to use the SideWinder2-SideWinder3, 03-2020 Instruction/Specification manual included with this SRL at time of shipping. Performance specifications are identical for both models.

### User Specifications

Max. User wt.: 130-310lb(59-140kg)

Max. Arrest Distance: 24”(610mm)

Max. Free Fall: 24”(610mm)

### Performance Specifications

Avg. Arrest force: 1,350lb(6kN)

Max. Arrest force: 1,800lb(8kN)

Brake System: Centrifugal, 100% sst.

Casing: Aluminum anodized

Casing Covers: 304 stainless steel

### Compliance

ANSI Z359.14-2012 Type A

OSHA 1926.502


Part No.	Length	Wt.
2904B	20ft	14lb
2903B	30ft	16lb

⊗ Inspection Points consult SideWinder2 manual pg.2


Fig.1A  
SideWinder3  
“A” end



### PID Labels English

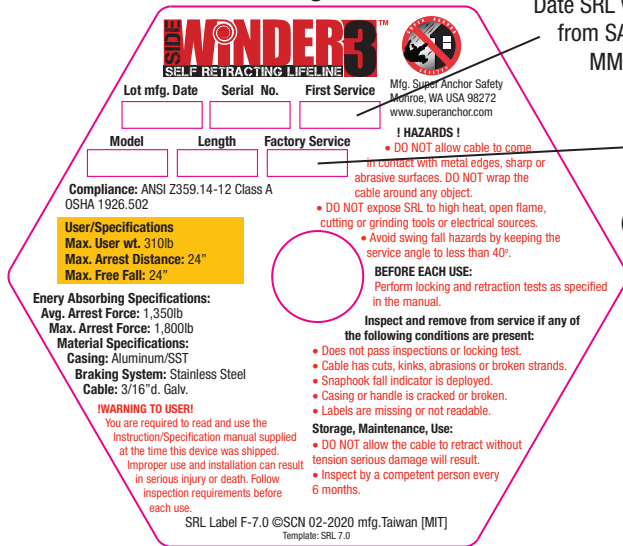

### Spanish

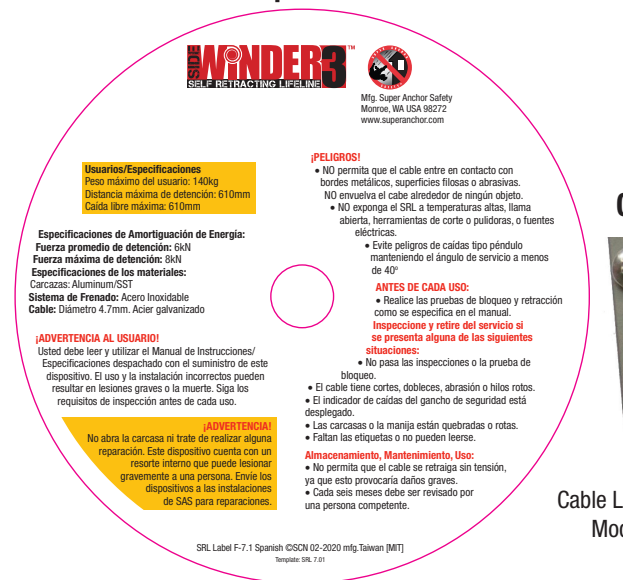

### Fig.2A Casing Laser Marks

