

Commercial Threaded Cap Anchors • CTT

CTT Anchors with Threaded Riser Cap

CTT anchors are designed to accept PPE bolt attached components mfg. by Super Anchor Safety, HVAC and other roof mounted equipment. Another SAS exclusive feature is our 1.0" thick riser cap with a water stopper plate that prevents moisture from entering the riser through the bolt hole. Specified for use with a 5/8"-11 attachment bolt. Ideal multi-use permanent anchor for applications that require PPE to be removed when not in use. Custom base plate and bolt hole sizes are available.

Specifications

- Min. Tensile Strength 5,000lb
- 5/8"-11x1.0" Riser Cap w/Water Stopper Plate
- Compatible with No.1028 Swivel-D, No.1090-SSA and No.1090-SSG Loop Tops
- SST Threaded Vent Hole Plug
- Hot Dip Galvanized, 304sst or 316sst
- No.2022 40pc fastener pack 52 hole base plate models only.
- Foam Filled Riser
- May be engineered for HVAC attachments and non-fall protection uses.
- Custom anchors available. Contact SAS Sales Team

Certification/Compliance

CTT are fabricated using the same design and material specifications as our CRA anchors.
ANSI Z359.18-17 type A
OSHA 1926.502


New ANSI Z359.18 Certification

← 10,000lb Tensile Strength →
Grade 5 cap screw
w/horizontal load applied

5/8"-11
Attachment
Bolt


SST Threaded
Vent Hole Plug

Foam Filled Riser

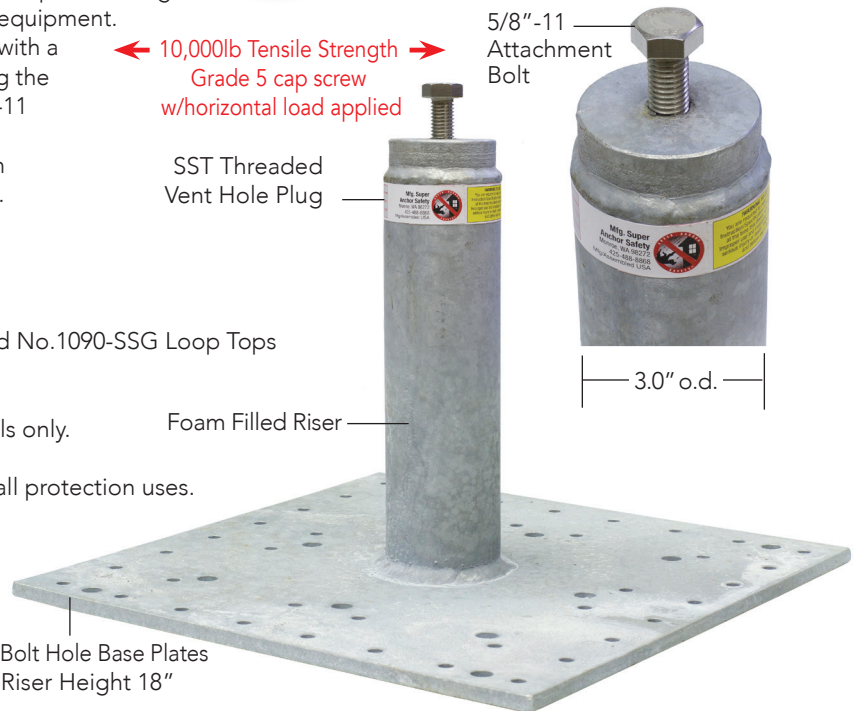

▲ 52 Bolt Hole Base Plates
Max. Riser Height 18"

5/8"-11 Threaded Riser Cap
Improved Threaded
Riser Cap Design

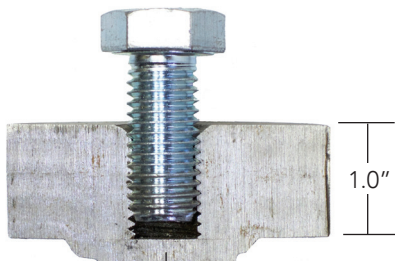

Water Stopper Plate

No.1028 Swivel-D



Request Unit Pricing

Riser Height	Part Name	Part No.	Material		Riser Sch	Base Plate
			Type	O.D/wt.		
△ □ 8	CTT-8	1480-G	HDG	3.0"	40	▲ 16"x16"x3/8" 52 Hole
		1480-S	304sst	36lb		
△ □ 12	CTT-12	1481-G	HDG	3.0"	0.203	
		1481-S	304sst	41lb		
△ □ 18	CTT-18	1482-G	HDG	3.0"		
		1482-S	304sst	46lb		
△ 24	CTT-24	1483-G	HDG	3.0"	80	12"x12"x5/8" 4-8 Bolt Hole
		1483-S	304sst	64lb		
△ 30	CTT-30	1484-G	HDG	3.0"	0.276	
		1484-S	304sst	79lb		
△ 36	CTT-36	1485-G	HDG	3.0"		12"x12"x3/4" 4-8 Bolt Hole
		1485-S	304sst	96lb		

Max. on site proof load, 2,500lb

□ May be attached with SAS specified screws.

△ Bolt attached, concrete embedment or field weld.

▲ 52 bolt hole base plates include 40pc 2-1/2" hex head screws for installation thru wood and Type B metal decking min. 22ga thickness.

Note 1: Bolt attached accessories or equipment not supplied by SAS may require engineering by others.

Note 2: Specify grade 5 or 8 cap screws for structural applications.