

Commercial Roof Anchors • CRO

CRO CAL-OSHA Compliant Anchors ANSI Z359.18 Certification

One of the strongest engineered anchor designs available our CAL-OSHA anchors have zero deformation with a 5,000lb load applied to the loop top at any angle. 3rd party certified, tested and engineered to comply with CAL-OSHA Title 8 requirements. Our 2.0" i.d. cast steel loop top has a min. tensile strength of 20,000lb. Choose from pre-engineered designs or custom fabrication. CRO anchors are mfg. in the USA

Specifications


- Min. Tensile Strength 5,000lb
- No.1093 Q345 and No.1093-S 316sst loop tops tensile strength rating of 20,000lb*
- Stainless Steel vent hole plug
- Hot Dip Galvanized (HDG), 304sst or 316sst
- Foam filled riser
- 3rd party engineering by DH Glabe & Assoc.
Report available upon request
- Custom anchors available. Contact SAS Sales Team

Compliance

ANSI Z359.18-17 Type A/T*
Window Washing: ANSI/IWCA 1-14.1
CAL-OSHA Title 8
OSHA 1926.502
**Request CRO Intertek 2019 Lab Report*

Specified Use

- Window Washing
- Single Person PPE
- HLL Systems

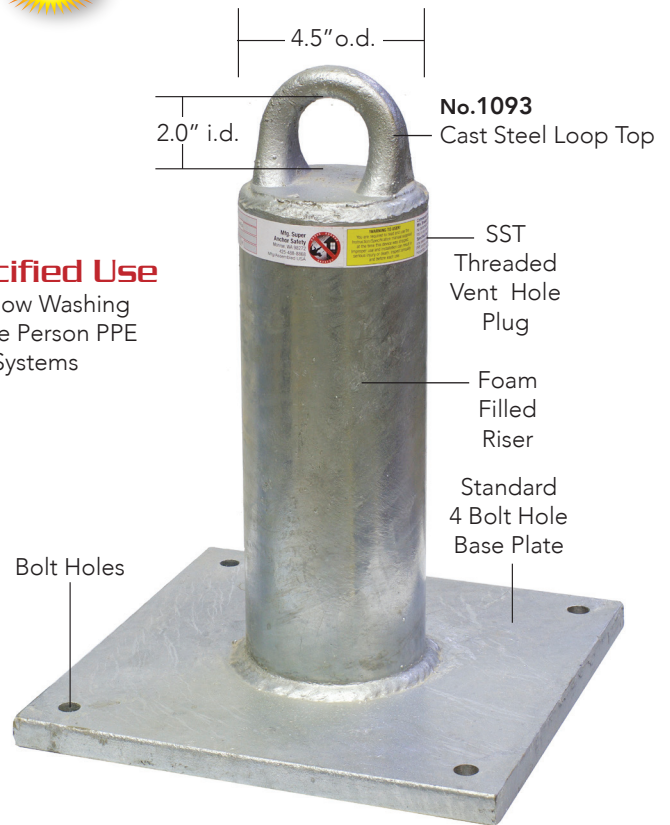

Request Unit Pricing

Riser Height	Part Name	Part No.	Material Type	Loop Top		Riser Material		Base Plate	
				No.	Type	O.D/wt.	Sch		
8	CRO-8	1400-G	HDG	1093	Q345	4.5"	80	12"x12"x5/8"	
		1400-S	304sst	1093-S	316sst	38lb			
12	CRO-12	1401-G	HDG	1093	Q345	4.5"		49lb	12"x12"x3/4"
		1401-S	304sst	1093-S	316sst	66lb			
18	CRO-18	1402-G	HDG	1093	Q345	4.5"		66lb	12"x12"x1.0"
		1402-S	304sst	1093-S	316sst	79lb			
24	CRO-24	1403-G	HDG	1093	Q345	4.5"		79lb	12"x12"x1-1/8"
		1403-S	304sst	1093-S	316sst	137lb			
30	CRO-30	1404-G	HDG	1093	Q345	4.5"	137lb	12"x12"x1-1/4"	
		1404-S	304sst	1093-S	316sst	158lb			
36	CRO-36	1405-G	HDG	1093	Q345	4.5"	158lb	12"x12"x1-3/8"	
		1405-S	304sst	1093-S	316sst				

2,500lb max. on site proof load.

Note 1: CRO anchors are specified for bolt, concrete embedment or field weld attachment to the supporting structure.

Note 2: Backer plates may be required for installation.