

Commercial Roof Anchors • CRO-TR


CRO-TR™ Threaded Top Anchor

Same base plate and riser specifications as our CAL-OSHA models. Features a 1" thick threaded riser cap with a waterproof bolt hole stopper. The threaded riser cap is ideal for attaching permanent or removable PPE fall protection anchors and bolt attached structures. Choose from pre-engineered designs or custom fabrication. Mfg. in the USA.

Specifications

- Min. Tensile Strength 5,000lb
- 5/8"-11x1.0" Riser Cap w/Water Stopper Plate
- Compatible with No.1028 Swivel-D, No.1090-SSA and No.1090-SSG Loop Tops
- SST Threaded Vent Hole Plug
- Hot Dip Galvanized (HDG), 304sst or 316sst
- Foam Filled Riser
- May be engineered for HVAC attachments and non-fall protection uses.
- 3rd party engineering by DH Glabe & Assoc. *Report available upon request*
- Custom anchors available. Contact SAS Sales Team

Standard 4 Bolt Hole
Base Plate

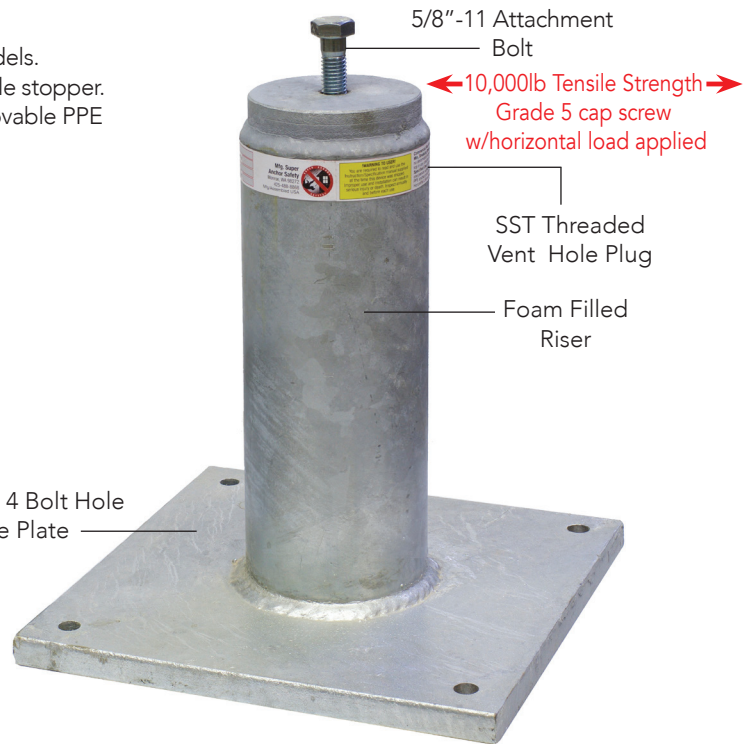

Compliance

ANSI Z359.18-17 Type A/T*
OSHA 1926.502

*Request CRO Intertek 2019 Lab Report

Request Unit Pricing

Riser Height	Part Name	Part No.	Material Type	Riser Material		Base Plate	
				O.D/wt.	Sch		
8	CRO-TR8	1486-G	HDG	4.5"	80	12"x12"x 5/8"	
		1486-S	304sst	38lb			
12	CRO-TR12	1487-G	HDG	4.5"		49lb	12"x12"x 3/4"
		1487-S	304sst				
18	CRO-TR18	1488-G	HDG	4.5"		66lb	12"x12"x 1.0"
		1488-S	304sst				
24	CRO-TR24	1489-G	HDG	4.5"		79lb	12"x12"x 1-1/8"
		1489-S	304sst				
30	CRO-TR30	1490-G	HDG	4.5"	137lb	12"x12"x 1-1/4"	
		1490-S	304sst				
36	CRO-TR30	1491-G	HDG	4.5"	158lb	12"x12"x 1-3/8"	
		1491-S	304sst				

Max. on site proof load 2,500lb

▲ Custom bolt hole sizes may be specified

▲ No.1028 is Q/A tested to pass a 10,000lb horizontal load.
CSA certified SAS factory test equipment.

Note 1: Bolt attached accessories or equipment not supplied by SAS may require engineering by others.

Note 2: Specify grade 5 or 8 cap screws for structural applications.

▲ 5/8"-11 Threaded Riser Cap

