

Commercial Sub-Surface Anchors

No.1305-SSA™ Sub-surface Anchor pat-pending

Another SAS exclusive design, the No.1305-SSA anchor base and backer plate are installed below the finished surface allowing only the receiver bolt to be visible. The adjustable bolt provides for a wide range of substrate thicknesses. SAS compatible PPE devices are threaded into the receiver bolt to provide fall protection for window washers, maintenance workers and elevator service personnel. When not in use the receiver is concealed with our low profile chrome plated steel cover. The ideal fall protection solution for exterior and interior installations.

Specifications

- 5,000lb min. tensile strength
- Primer coated steel
- Concrete decks, balconies and tilt walls
- Wood or steel framing
- Exterior and interior walls
- Floors with all types of coverings
- Elevator exterior and interior walls


Compliance

ANSI Z359.1 / OSHA 1926.502

Ordering Information

No.1305-SSA Complete Kit
Stock Part

New Product

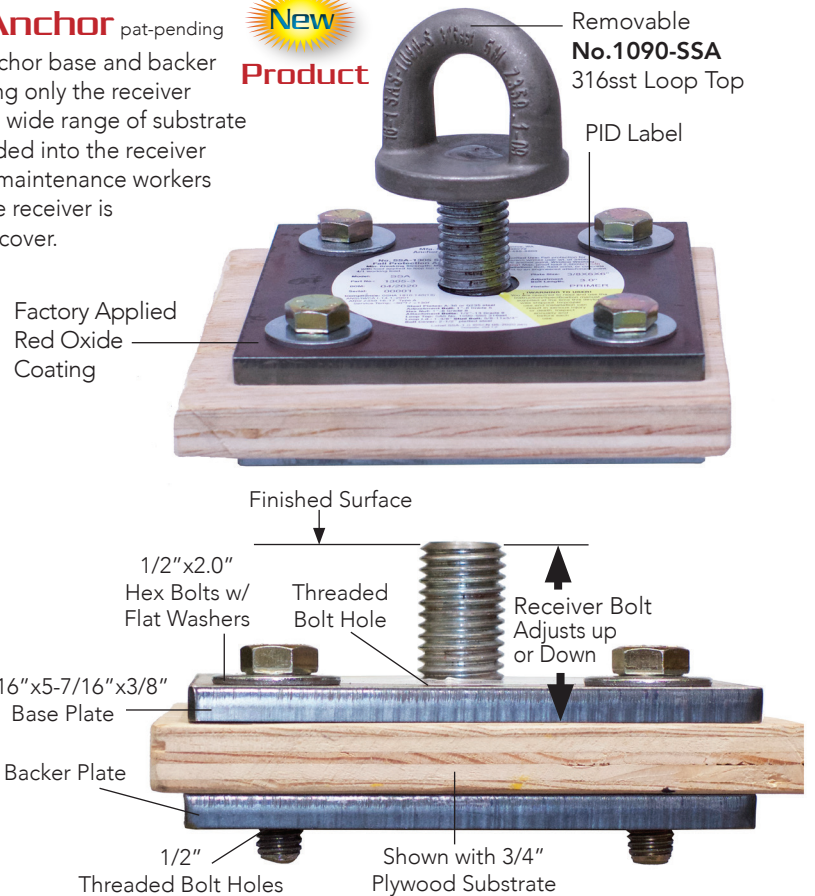

Optional PPE Anchor

No.1028 Swivel-D may be used as a temporary anchor. Order separately.




Adjustment Bolt Slab Depths

Part No.	Adjustment Bolt Length	Slab Depth/Inches	
		Min.	Max.
1305-3	3.0"	1.0"	2.0"
1305-5	5.0"	2.0"	4.0"
1305-X	Custom	Specify Slab Depth	



No.1090-SSA Bolt Attached Cast Steel Loop Top

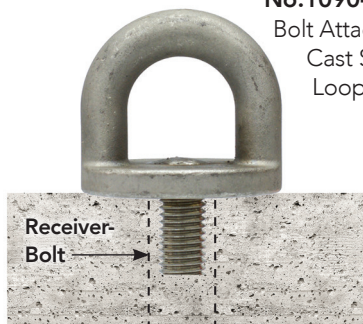

Thickness Durable Low Profile Cover Plate

3/16"

