

Commercial Anchors • Loop Top Fixtures

Cast Loop Top Fixtures

The same cast steel loop tops used for our commercial CRA, CRO and D-plate anchors.

Specifications

- 3rd party certification and engineering.
- No.1093 GB/SB bolt-thru models are rated for window washing, HLL systems and lifting.
- Hot Dip Galvanized (HDG), or 316sst
- No.1090 min. tensile strength 10,000lb
- No.1093 min. tensile strength 20,000lb

Note: Top fixtures are not sold as components for anchor fabrication by others.


Compliance

ANSI Z359.18-17 Type A/T
ANSI/IWCA 1-14.1

Stamp Marks

- Date of mfg.
- SAS part no.
- Min. tensile strength
- Lot no.
- ANSI standard

No.1090-SBS

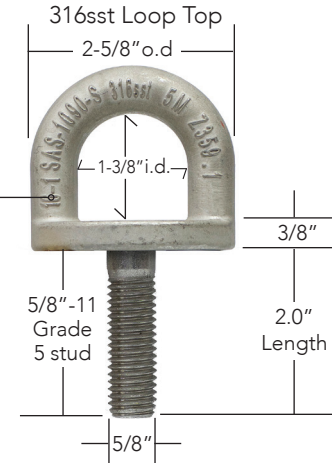





No.1091-GBS

Pass-Thru Top




Request Unit Prices

	Part No.	Material	Type	i.d.
	▲ 1090-GBS	HDG Q235	Stud Bolt 5/8"x2.0"	1-3/8"
	▲ 1090-SBS	316 sst		
	▲ 1090-SSG	HDG Q235	Stud Bolt 5/8"x3/4"	
	▲ 1090-SSA	316 sst		
	1091-GBS	HDG Q235	Stud Bolt 5/8"x2.0"	
	1091-SBS	316 sst		
	▲ 1093-GB	HDG Q345	Bolt-Thru 5/8"x Specify	2.0"
	▲ 1093-SB	316 sst		
	1093-GBS	HDG Q345	Stud Bolt 5/8"x Specify	
	1093-SBS	316 sst		


No.1093-SBS

Stud Bolt

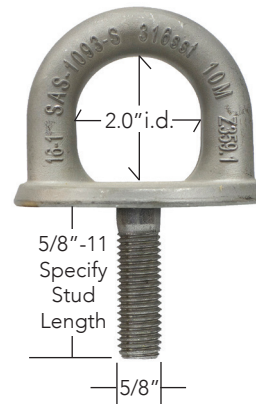


No.1093-GB

Bolt-Thru

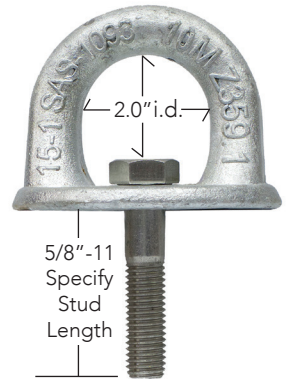

No.1093-GB

Bolt-Thru

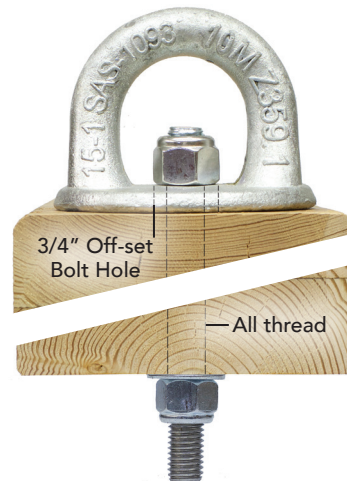

Max. on site proof load 2,500lb

▲ Stock Part

Note 1: Stud bolts are grade 5 only.

Custom Fabrication

Custom length stud bolts and attachment bolts are available in grade 5, 8, 18-8sst and grade 5 all thread.



Fasteners

Stud Bolt models are supplied with lock nuts and flat washers. Bolt-thru models require the bolt length to be specified by the customer.