
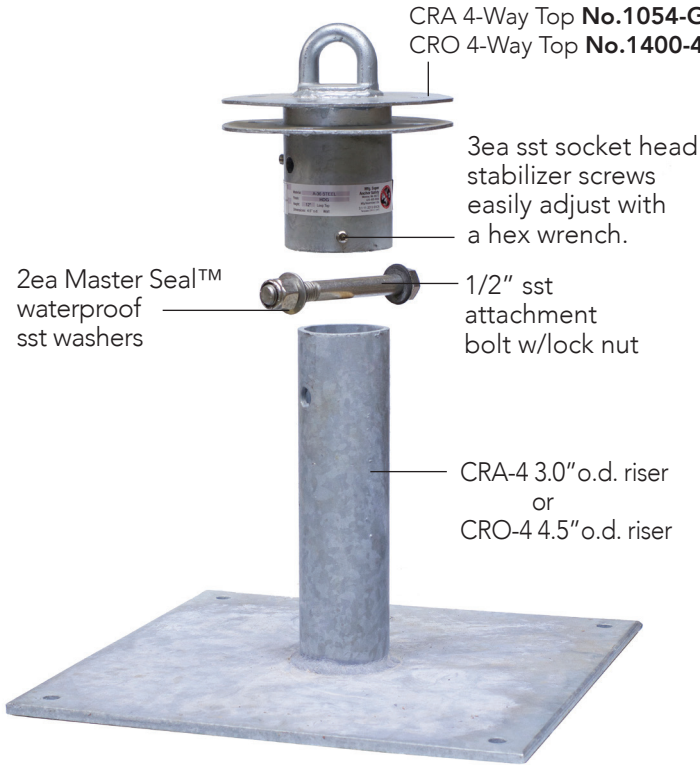


Horizontal Lifeline 4-Way Fixtures

CRA-4/CRO-4 Horizontal Lifeline Anchors

A Super Anchor Safety exclusive design that allows up to 4 HLL components to be attached to a single anchor point reducing the number of end anchors required for a HLL system and provides a way to intersect additional lines at 45° and 90° angles. Anchors are supplied with a CRA or CRO blank foam filled riser w/base plate. The top fixture is attached with a single bolt, seal washers and lock nut for a watertight installation. Three sst socket screws are used to stabilize the 4-Way after installation. The removable top fixture facilitates the installation of roof flashings for new or recover projects. Our 4-Way anchors are a very efficient way to link several HLL's together, and provide for future expansion of the HLL system.

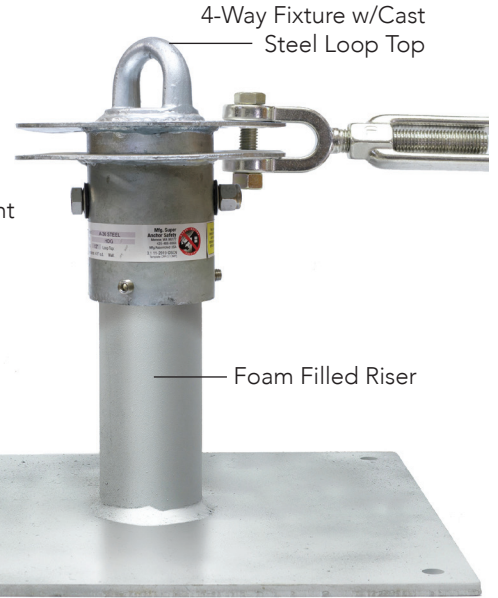

Specifications

- Complies with OSHA 1910.140
- 4-Way Fixture w/Cast Steel Loop Top
- 5,000lb min. tensile strength
- Compatible with SAS HLL components
- Maximum HLL = 120ft.
- Hot Dip Galvanized (HDG), 304sst or 316sst
- 3rd Party engineering by DH Glabe & Assoc. *Report available on request.*
- SAS HLL design service upon request
- Custom anchors available. Contact SAS Sales Team

Compatible Components

4-Way tops accept any combination of these components:
 No.1058-HDG Turnbuckle No.1058-S SST Turnbuckle No.1081-S Coupler

