

# Horizontal Lifeline Components • CRA-4

## CRA-4 Horizontal Lifeline Anchor

CRA-4 are specified for end and intermediate HLL anchors and require bolt, field weld, or concrete embedment attachment to the supporting structure. Not rated for window washing anchors.

### Specifications

- Tensile Strength 5,000lb
- Foam filled riser
- Hot Dip Galvanized (HDG), 304sst or 316sst
- 3rd party engineering by DH Glabe & Assoc.  
*Report available upon request*
- Custom anchors available. Contact SAS Sales Team

### Ordering Information

- Order CRA-4 standard or custom model size.
- Order CRA 4-Way Top  
Includes required fasteners

### Compliance

ANSI Z359.18-17 Type A\*  
OSHA 1926.502

*\*Request CRA Intertek 2020 Lab Report*

## CRA 4-Way Top Fixture


Plate Diameter 7-1/2"

No.1090 Cast Steel Loop Top

Component attachment  
9/16" Bolt Holes

Height  
Above  
CRA-4  
Riser  
3-1/2"

Overall  
Height  
7-1/2"

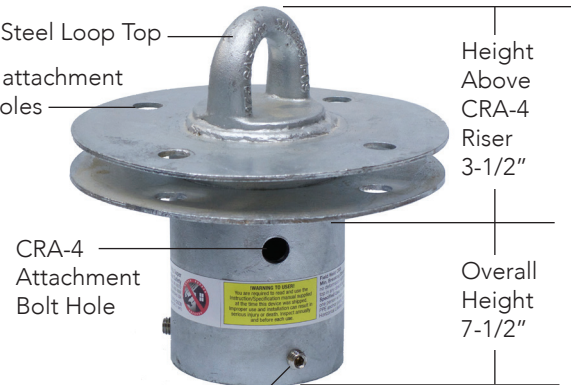

CRA-4  
Attachment  
Bolt Hole

3 Place SST  
Socket Screws

Bonded SST  
Seal Washers


1/2"x4-1/2" 18-8sst  
Attachment Bolt  
w/Lock Nut

## CRA-4 Anchor

CRA 4-Way  
Attachment  
Bolt Hole

Foam Filled  
Blank Riser

Base Plate

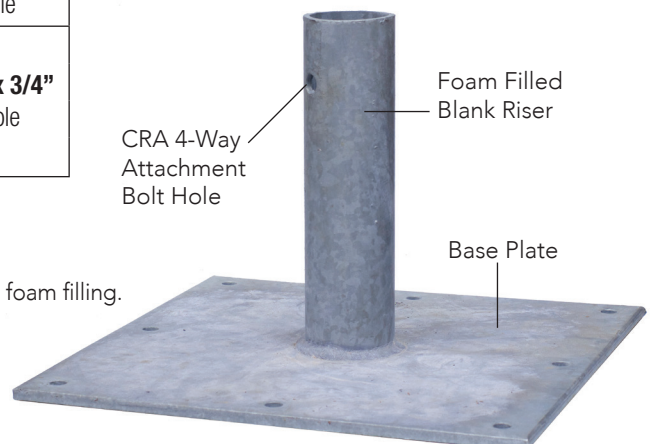

## CRA 4-Way Top Fixture wt. 7lb

Part Name	Part No.	Material Type	Cast Loop Top
CRA 4-Way	▲ 1054-G	Hot Dip Galvanized	1090 Q235 Steel
	▲ 1054-S	304 Stainless Steel	1090-S 316sst

## CRA-4 Standard Models

Riser Height	Part Name	Part No.	Material Type	Riser		Base Plate		
				O.D/wt	Sch			
△ ■ 5	CRA-4-5	1031-4G	▲ HDG	3.0"	40 0.203	6"x6"x3/8"		
		1031-4S	304sst	35lb				
△ 8	CRA-4-8	1035-4G	▲ HDG	3.0"		80 0.276	16"x16"x 3/8" 52 Hole	
		1035-4S	304sst	35lb				
△ 12	CRA-4-12	1032-4G	▲ HDG	3.0"				40lb
		1032-4S	304sst					
△ 18	CRA-4-18	1033-4G	▲ HDG	3.0"			45lb	16"x16"x5/8" 12 Hole
		1033-4S	304sst					
△ 24	CRA-4-24	1042-4G	▲ HDG	3.0"			63lb	12"x12"x 3/4" 4-8 Hole
		1042-4S	304sst					
△ 30	CRA-4-30	1025-4G	HDG	3.0"			78lb	
		1025-4S	304sst					
△ 36	CRA-4-36	1026-4G	HDG	3.0"	94lb			
		1026-4S	304sst					

Do not proof load 4-Way Tops

▲ Stock part

△ Bolt attached, concrete embedment or field weld.

■ Supplied with 4ea 1/2"x1-3/4" sst bolts w/lock nuts and washers without foam filling.