

# Horizontal Lifeline Components • CRR-4

## CRR-4 Field Weld Risers

CRR-4 4.5" o.d. field weld risers are mfg. to the same specifications as our CRO anchor and have zero deformation with a 2,500lb load applied. Specified for CRO HLL system ends or intermediate anchors. Choose from pre-engineered or custom riser heights. CRR-4 anchors are mfg. in the USA.

## Specifications

- Min. Tensile Strength 5,000lb
- HLL end or intermediate anchors.
- Use with No.1400-4WG 4-way top
- Hot Dip Galvanized (HDG), 304sst or 316sst
- 3rd party engineering by DH Glabe & Assoc.  
*Report available upon request*
- Custom anchors available. Contact SAS Sales Team

## Ordering Information

- Order CRR-4 standard or custom riser height
- Order CRO 4-Way Top  
Includes required fasteners

## CRO 4-Way Top Fixture wt. 15.5lb

Part Name	Part No.	Material Type	Cast Loop Top
CRO 4-Way	▲1400-4WG	Hot Dip Galvanized	1093 Q345 Steel

▲ Stock part

## CRR-4 Request Unit Pricing

Riser Height	Part Name	Part No.	Material Type	Riser Material	
				O.D./wt.	Sch
8	CRR-4-8	1201-4G	HDG	4.5"	80 0.337
		1201-4S	304sst	12lb	
12	CRR-4-12	1202-4G	HDG	4.5"	
		1202-4S	304sst	17lb	
18	CRR-4-18	1203-4G	HDG	4.5"	
		1203-4S	304sst	28lb	
24	CRR-4-24	1204-4G	HDG	4.5"	
		1204-4S	304sst	36lb	
30	CRR-4-30	1205-4G	HDG	4.5"	XX 0.674
		1205-4S	304sst	79lb	
36	CRR-4-36	1206-4G	HDG	4.5"	
		1206-4S	304sst	91lb	

Do not proof load 4-Way Tops

**Note 1:** Field welded risers cannot be foam filled prior to welding.  
PID label supplied for installation after field welding.


## Compliance

ANSI Z359.18-17 Type A\*  
Riser conforms to CAL-OSHA Title 8  
OSHA 1926.502


\*Request CRA Intertek 2019 Lab Report

## CRO 4-Way Top Fixture

Plate Diameter 9-3/4"

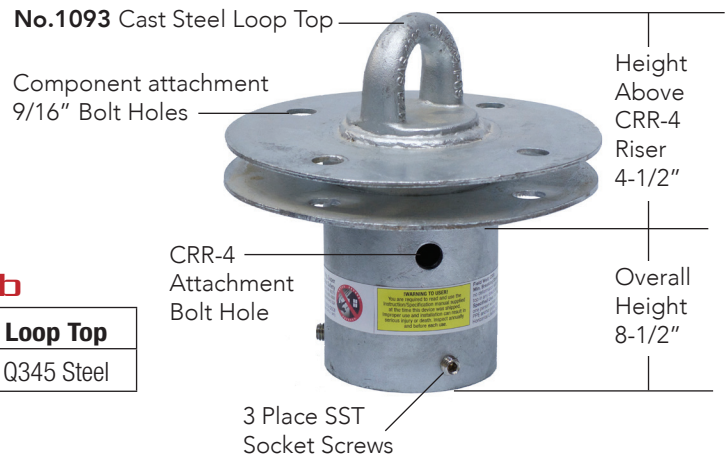

Bonded SST Seal Washers



1/2"x7.0" 18-8sst Attachment Bolt w/Lock Nut

## CRR-4 Anchor

