


# Horizontal Lifeline Components

## Component Couplers

SAS component couplers are mfg. with heavy gauge stainless steel and have a 5,000lb min. tensile strength. Designed primarily for SAS engineered HLL systems to link turnbuckles, energy absorbers and 3/8" wire rope eye thimble terminations. Supplied with stainless steel attachment bolts and lock nuts shown with each component.

## No.1081-S Coupler

Specified for attaching eye thimbles to No.1090 loop tops and 4-Way tops.

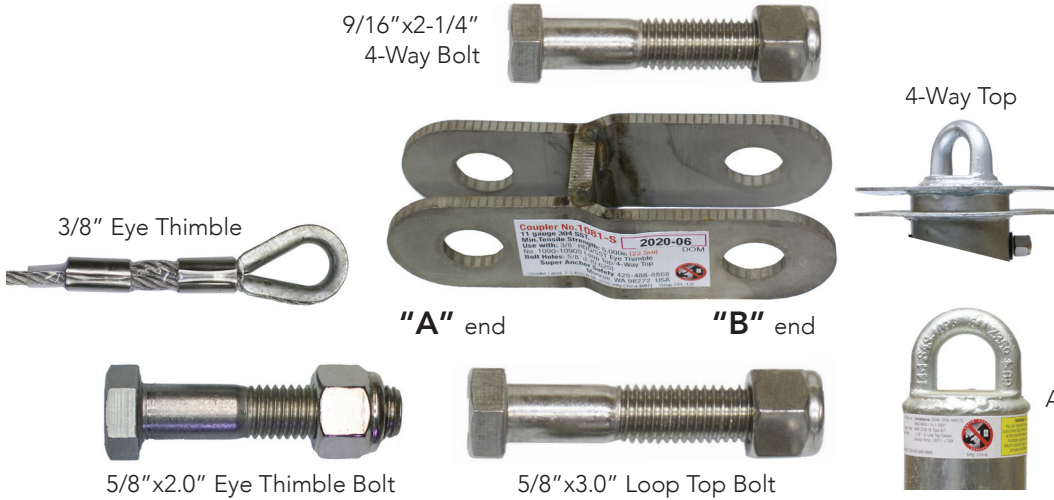

## Pkg. Contents

**Material:** 304sst

**Bolts:** 5/8" x 2.0" Eye Thimble  
5/8" x 2-1/4" Loop Top  
9/16" x 2-1/4" 4-Way Top

**Dimensions:** 4-1/2" x 1-3/8"

**Compatibility:**

**A-end:** 1-1/4" i.d. fits 3/8" Eye Thimbles

**B-end:** 13/16" i.d. fits No.1090 Loop Tops 4-Way Tops

**Pkg/wt.** 1.5 lbs

Anchors w/No.1090 Loop Tops



## No.1087-SA Coupler

Specified for attaching Coil and Spring E/A's to turnbuckles.

## Pkg. Contents

**Material:** 304sst

**Bolts:** 5/8" x 2.0" Eye Thimble  
5/8" x 3.0" Turnbuckle  
5/8" x 1-1/2" Coil Absorber  
3/8" x 1.0" Spring Absorber

**Dimensions:** 5-3/8" x 1-1-3/8"

**Compatibility:**

**A-end:** 1/4" i.d. fits Coil/Spring absorbers

**B-end:** 15/16" i.d. fits Eye Thimble Turnbuckles

**Pkg/wt.** 1.5 lbs

**Note:** The No.1087-SA is a dual purpose coupler. The A-end is compatible with No.1065-AC and No.1065-AS Energy Absorbers.

\*E/A= Energy Absorber

No.1058/No.1058-S Turnbuckles

