

Max Force™ CSA Personal Energy Absorbers

SAS offers a complete line of CSA certified energy absorbers that comply with CSA Z259.11-17. Choose from standard or Ultra-Lite™ E/A models. Specified for use in Canada and mfg. at SAS factory Monroe, WA, USA.

Specifications

- 100% Polyester Webbing
- Loop End Wear Pads
- Clear PVC Shock Pack Cover
- English/French labels and manuals
- Serial numbered inspection label with date of first use and Fall Indicator
- Hip High Rope Grab position for easy-to-reach adjustment
- 3,600lb Gate Strength CSA Compliant Snaphooks and Carabiners

Comparison


ANSI Z359.13-13

- User wt.: 130-310lb
- English/Spanish labels and manuals

CSA 259.11-17

- User wt.: 135-310lb[60-140kg]
- English/French labels and manuals

Front Side E/A PID Label

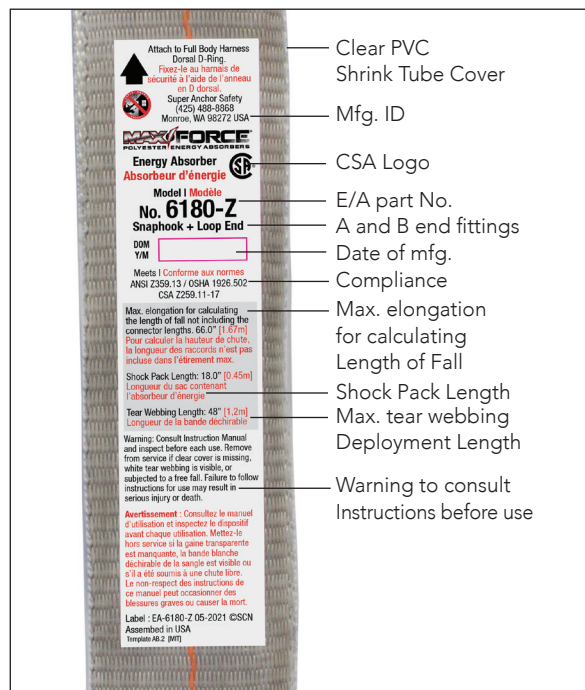


CSA Performance Factors

- User wt. range: 135-310lb[61-140 kg]
- Max. Free-Fall Distance: 6ft[1.8 m]
- Average Arrest Force: 770lb[3.5 kN]
- Max. deployment@ 3,600lb[16kN]: 54.0"[1.4m]
- Length of Fall max. deployment: 66"[1.6 m]
- Tear Webbing max. deployment: 48"[1.2 m]
- Max. Deployment Factor @ 310lb[140 kg] = 0.58
- Performance Factor not less than 2.3




Inspection/ Fall Indicator Label

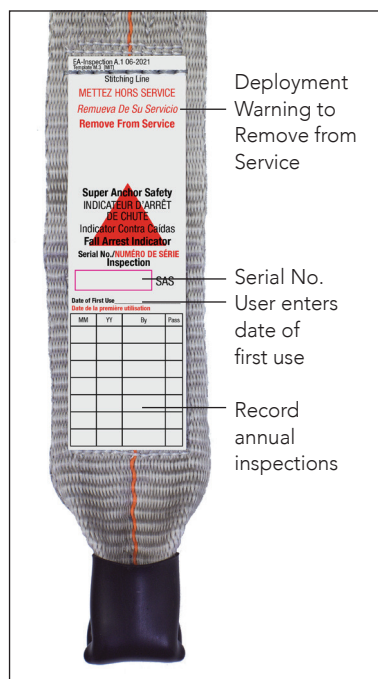

CSA Performance Label

Back side of E/A

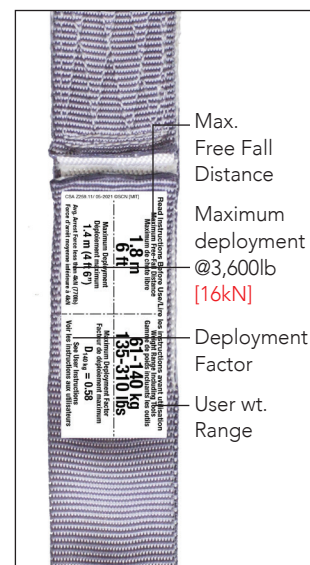

Note: Absorber service lengths and weights as specified in this catalog are approximate and subject to slight variances.