


# Lanyards and Connector Options

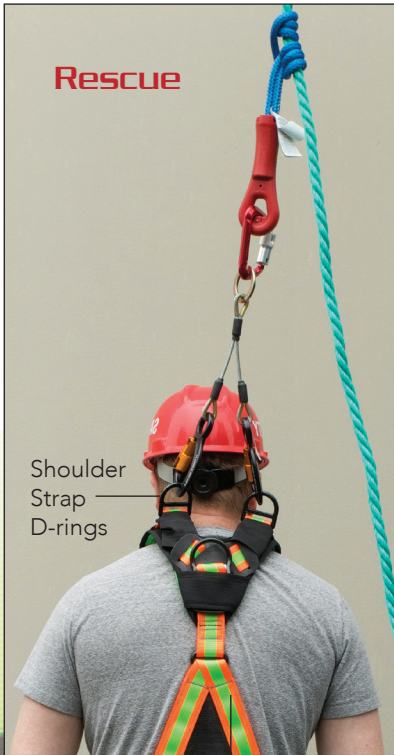

**Rescue**

Shoulder Strap  
D-rings

No.FD-6071  
Front D-ring Harness



X-Line® Pneumatic Air Hose Lifeline System w/ No.4015 SuperGrab™

Fall Restraint / Work Positioning

No.6101  
Deluxe  
Harness™

## 2-D Lanyards™ Super Anchor Safety Exclusive

After many requests SAS has developed a twin lanyard that allows workers to use the side D-rings of a full body harness for work positioning, fall restraint and rescue. Made in our Monroe, WA factory, USA.

### Specifications

- 4,000lb min. Tensile strength.
- Compact and lightweight
- Connector ring is compatible with ANSI/CSA 3600lb gate strength snaphooks and carabiners
- 7x19x3/16" Wire rope w/Steel thimbles

No.6515-C  
2-D Lanyard

Aluminum swages w/thick wall adhesive shrink tube cover.

Connector Ring

No.TB3-6070  
Tongue Buckle  
Side D-ring Harness