

Custom Size Deluxe™ Harness Worksheet pg.2

Harness size used to measure:

Sm Med Lrg Long-Lrg X-Lrg

Table 3 Dimension Adjustments

Component	Specify Length/Inches		
	Longer	Shorter	No Change
a) Chest Strap Length			
b) Shoulder Pad Length			
c) Shoulder Strap Length			
d) Leg Strap Length			
e) Leg Pad Length			
f) Waist Belt Length			
	Higher	Lower	No Change
g) Waist Belt Position			

Custom Size Instructions:

- 1) Put on a standard size Deluxe™ Harness for dimension reference and specify the size you used in the section above Table 3.
- 2) Determine what part of the harness does not fit and needs adjustment.
- 3) Using Fig.1, measure the part or parts that need adjustment from the points shown with red dimension lines.
- 4) Complete Table 3 dimension adjustments
- 5) Complete pg.1 ordering instructions in each section, waist belt length, webbing and frame color options and number of harnesses.

Primary Adjustments

The 3 most common adjustments are:


- 1) Chest strap too high (b)
Correction: Lengthen shoulder pads and back pads equally
- 2) Chest strap too short (a)
Correction: Lengthen
- 3) Waist belt too high (g)
Correction: Lengthen shoulder and back pads equally.

Waist Belt Position

Does the waist-belt position on your hips need to be higher or lower? Measure from the D-ring position as shown in Fig.1 and enter inches on line g)

Ordering Instructions

Return completed pgs.1 and 2 to your SAS sales person by e-mail address on pg.1

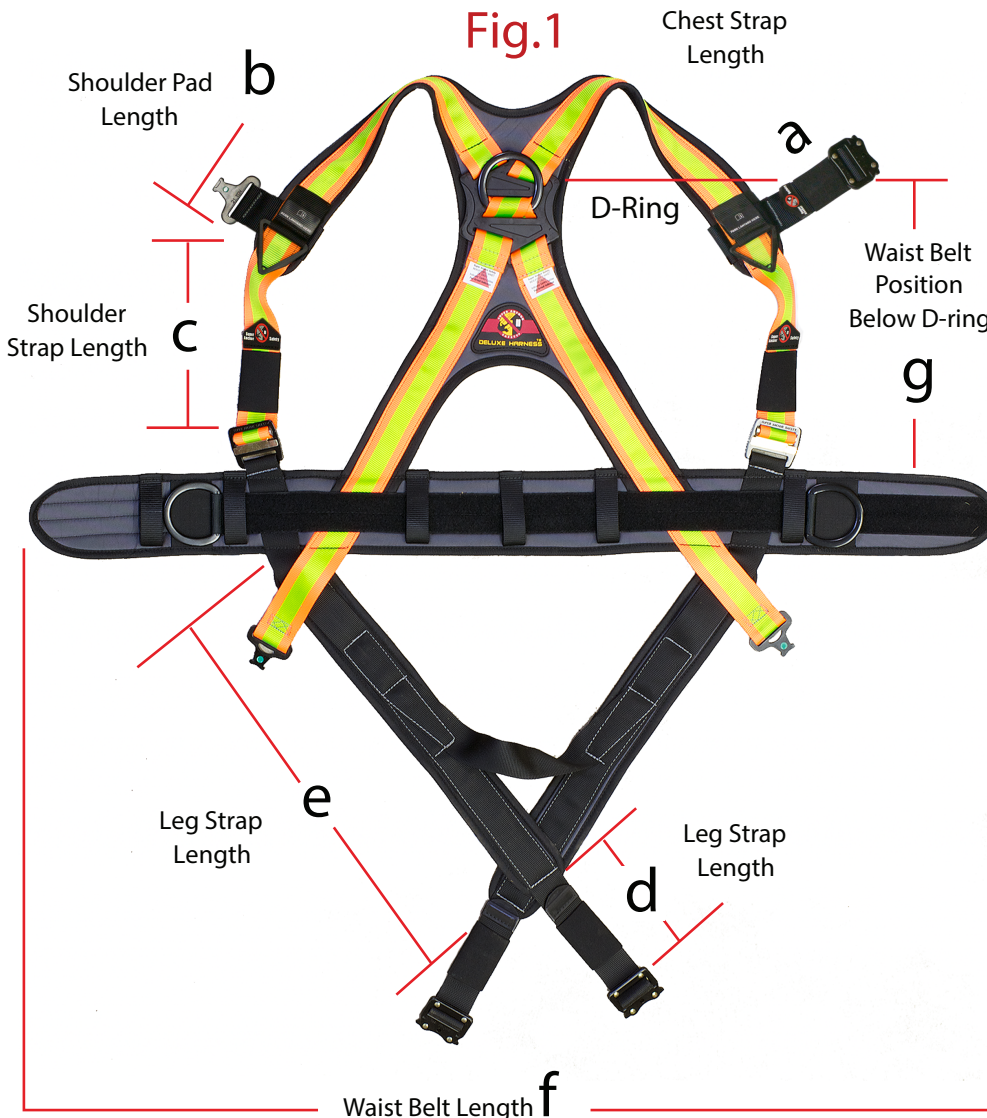

Pg.2 Form Completed by:

Print Name: _____

Date: _____



Super Anchor Safety Sales Office,
Monroe, WA 425-488-8868