

Flex™ Energy Absorbing Lanyards

Flex™ Energy Absorbers are designed to expand and contract during use. They have an internal shock absorbing component to reduce free fall forces. Ideal for use with lift equipment or stationary work areas working with lift equipment.


Features

- Lightweight expandable service length up to 6ft
- Fall indicator and annual inspection label
- 3,600lb(16kN) gate strength connectors
- Supplied in retail box


Performance Specifications

User wt's: 130-310lb
Max. Arrest Force: 1,800lb
Max. Deployment: 48"
Max. Free Fall: 6ft
Fully Deployed: 10ft

Note: Due to availability some lanyards may be supplied with black webbing. Ask when ordering.

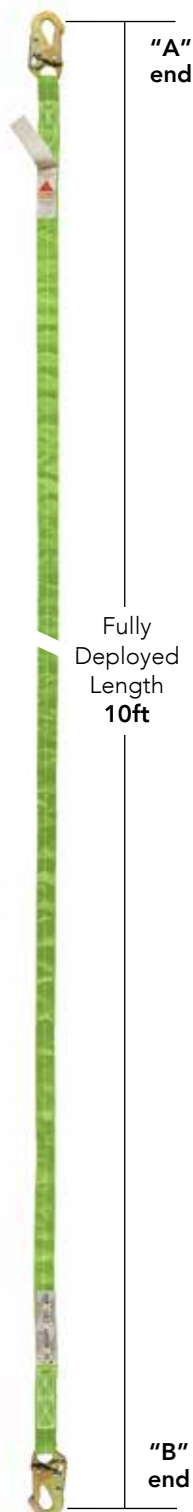

No.6501

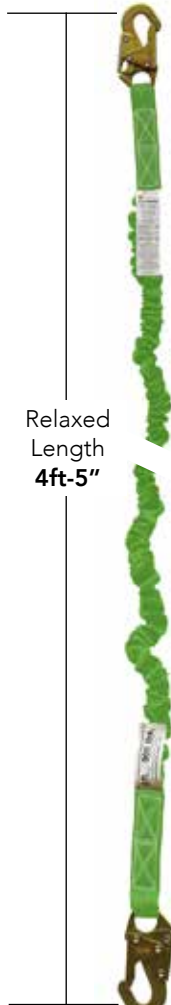

Relaxed Length
4ft-5"

△ **No.6502**



△ **No.6503**



△ **No.6504**



No.6501
Retail Package



△ **Retail Box**



Labels

PID

Fall Indicator



Annual Inspection Label

Ordering Information

Part No.	A-end	B-end	wt.	Service Lengths		
				Relaxed Length 4ft-5in	Max. Service Length 6ft	Fully Deployed Free-Fall 10ft
6501	Snaphook	Snaphook	2.5lb	Relaxed Length 4ft-5in	Max. Service Length 6ft	Fully Deployed Free-Fall 10ft
6502		Rebarhook	3.5lb			
6503		2 Snaphooks	4lb			
6504		2 Rebarhooks	6lb			

Compliance

ANSI Z359.13-13
 OSHA 1926.502