


Adjustable Rope/2-D Lanyards

No.4110

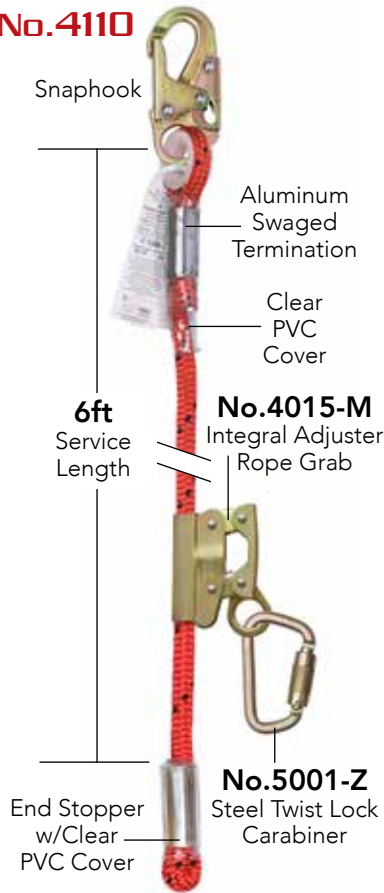

No.4110 Adjustable Rope Lanyard is designed specifically for use in lift buckets, boom lifts and scissor lifts.

Features

- 5/8" kernmantle rope
- Aluminum swaged terminations w/clear PVC shrink tube covers
- Captive zinc plated rope grab
- 3,600lb gate strength connectors
- PID and inspection label
- Instruction manual
- Mfg. at Super Anchor Safety factory in Monroe, WA USA

Retail Package



Ordering Information

Part No.	A-end	Rope Grab	Carabiner	wt.
4110	Snaphook	No.4015-M	No.5001-Z	4.0lb

Compliance

ANSI Z359.13-13
OSHA 1926.502



2-D Lanyards™

2-D lanyards link the side D-rings of a full body harness for fall restraint or work positioning. A SAS exclusive mfg. at our factory in Monroe, WA USA

Features

- Compact and lightweight
- 4,000lb min. tensile strength
- 3/16" Wire rope w/steel thimbles
- 3,600lb gate strength connectors
- PID and inspection label
- Instruction manual

Ordering Information

Part No.	Carabiner	wt./oz
6515-C	Δ No.5000-Z	17
6515-CA	Δ No.5006-Z	
6515-CS	Steel No.5001-Z	25

Δ Aluminum twist lock carabiners w/anodized coating



20

Retail Package



Compliance

ANSI Z359.13-13
OSHA 1926.502