

Web Lanyards


Adjustable Length Web Lanyard

No.6014-72A Adjustable Length Web Lanyard

is specified for fall restraint use. Attaches to a full body harness dorsal D-ring or side D-rings. Mfg. at Super Anchor Safety factory in Monroe, WA USA

Ordering Information

Part No.	A-end	B-end	wt.
6014-72A	Snaphook	Snaphook	36

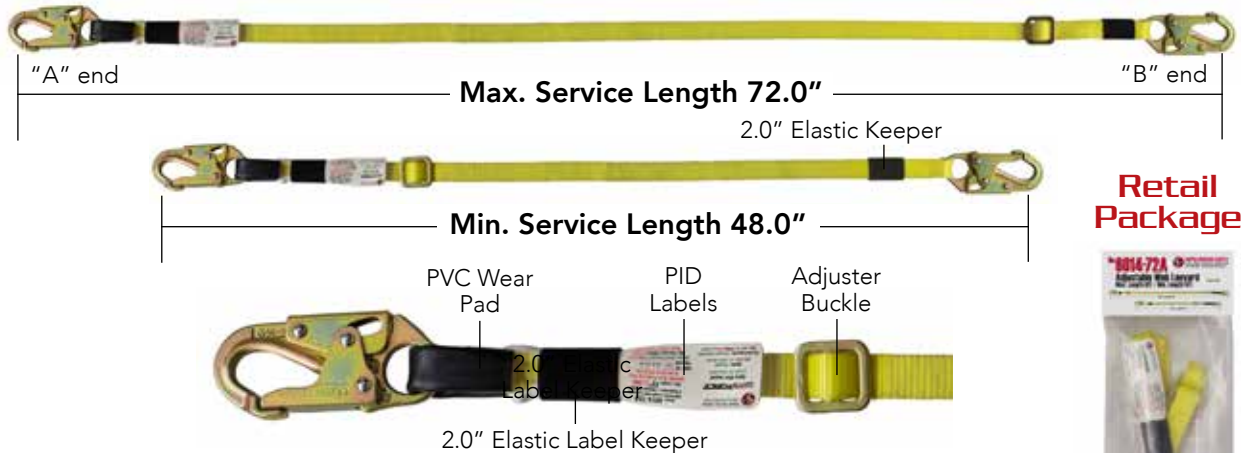

Retail Package



Features

- 8,700lb 1.0" nylon webbing
- 3,600lb gate strength connectors
- 5,000lb zinc plated adjuster buckle
- Non-energy absorbing
- Serial numbered
- PID and inspection label
- Instruction manual
- Mfg. at Super Anchor Safety factory in Monroe, WA USA

Compliance

ANSI Z359.13-13
OSHA 1926.502

Fixed Length Web Lanyards

Fixed Length Web Lanyards are specified for fall restraint use but may be used with an energy absorber for fall arrest. Mfg. at Super Anchor Safety factory in Monroe, WA USA

Features

- 8,700lb 1.0" nylon webbing
- 3,600lb gate strength connectors
- Non-energy absorbing
- Serial numbered
- Instruction manual
- PID and inspection label



No.6014-72W w/B-end Snaphook

Ordering Information

Part No.	Length	A-end	B-end	wt./oz
6014-18	18.0"	Snaphook	Loop End	16
6014-24	24.0"			17
6014-36	36.0"			19
6014-48	48.0"			22
6014-60	60.0"			24
6014-72	72.0"			27
6014-72W	72.0"			Snaphook

Compliance

ANSI Z359.13-13
OSHA 1926.502

Retail Package



Custom Lanyards

Consult our Custom Web Lanyard Worksheet for lanyards mfg. with several connector options and lengths.