TossR[®] Self Retracting Lifeline



Features

- Heavy duty ABS housing
- UHMWPE 4,500lb webbing
- Swivel attachment w/No.5001-Z twist lock carabiner
- 6kN external energy absorber
- Fall indicator label
- Serial No. and part number
- English/ Spanish PID labels
- Retail box

Compliance

ANSI Z359.14-12 Class A

Performance Specifications

Webbing Min. Strength: 4,500lb (20kN) Webbing Type: UHMWPE 19mm User wt.: ANSI Z359.14-12 =310lb(140-kg) OSHA 1926.502 =410lb(190kg) Max. Arrest Distance: 24"(.6m)

Avg. Max.Arrest Force: 1,350lb (6kN) Energy Absorber Deployment: 48"


Ordering Information

Part No.	Length	wt/lb
2990-A6	6ft	2.5
2990-A11	11ft	3.5



Lightweight and compact, Toss'R™ models are ideal for confined spaces, work platforms and lift equipment. Non-repairable class A are disposed of when subjected to a fall or damaged in service. That's why we named it the Toss"R.

No.2990-A6 6ft

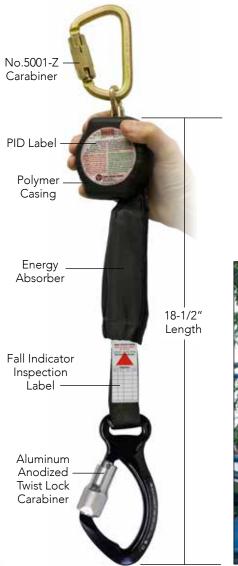

Lift Truck



Boom Lift





27