

# Top Chord Safety/Truss/Attic Bars


## No.2833-DP Truss Bar™

- Moveable/temporary anchor fits 2x4 and 2x6 top chords spaced 24.0" centers
- 2 person fall arrest/fall restraint
- 2ea 24" removable D-ring tie-off straps
- 3/8" SST detent pin w/shock cord
- Powder coated steel
- English/Spanish/French manuals
- ANSI Z359.18-17 type A
- CSA Z259.15.22 type A
- Canadian 3rd party engineering. Report provided upon request

## Ordering Information

Part No.	Package	Pcs	wt.
2833-DP	Box	1	6.5lb
Δ 2833			5.5lb

Δ Supplied with hex bolts.

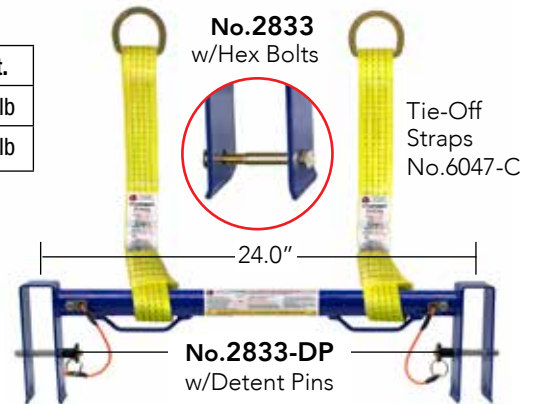

## No.1012 Safety Bar™

- Moveable/temporary anchor
- 2 person fall arrest/fall restraint
- Fits 2x4 and 2x6 top chords
- 48.0" length w/legs spaced 24.0" o.c.
- 3/8" SST detent pin w/shock cord
- Powder coated steel
- English/Spanish/French manuals
- ANSI Z359.18-17 type D
- CSA Z259.15.22 type AD
- Canadian 3rd party engineering. Report provided upon request

## Ordering Information

Part No.	Package	Pcs	wt.
1012	Box	1	12lb



Detent Pin No.2015-2.2-8 w/ Shock Cord Tether




## No.1017-A Joist Safety Bar™

- Moveable/temporary anchor
- 2 person fall arrest/fall restraint
- Fits 2x4 web trusses
- 48.0" length w/legs spaced 24.0" o.c.
- 3/8" SST detent pin w/shock cord
- Powder coated steel
- English/Spanish manuals
- ANSI Z359.18-17 D
- CSA Z259.15.22 AD

## Ordering Information

Part No.	Package	Pcs	wt.
1017-A	Box	1	17lb

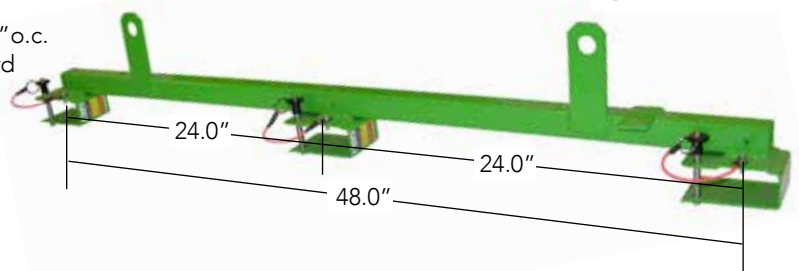

Detent Pin No.2015-2.2-6 w/ Shock Cord Tether



## No.2835 Attic Truss Bar

- Moveable/temporary anchor
- 1 person fall arrest/restraint
- Adjustable to fit 12", 16", 24" spaced 2x top chords/rafters
- 6mm 5052 grade aluminum
- 25pc 2.0" WS screws w/driver
- Specified for SRL's and HLL's
- English/Spanish manuals
- ANSI Z359.18-17 type A
- CSA Z259.15.22 type A

## Ordering Information

Part No.	Package	Pcs	wt.
2835	Box	1	6.5lb



No.2084-2.0 WS Screws w/3/8" Nut Driver

