CRZ-4

HLL End/Intermediate Anchor

5,000lb Min. Tensile Strength
Max Proof Load 2,500lb

CRZ-4

Fig.1 **End View**

Fig.2 **Front View**

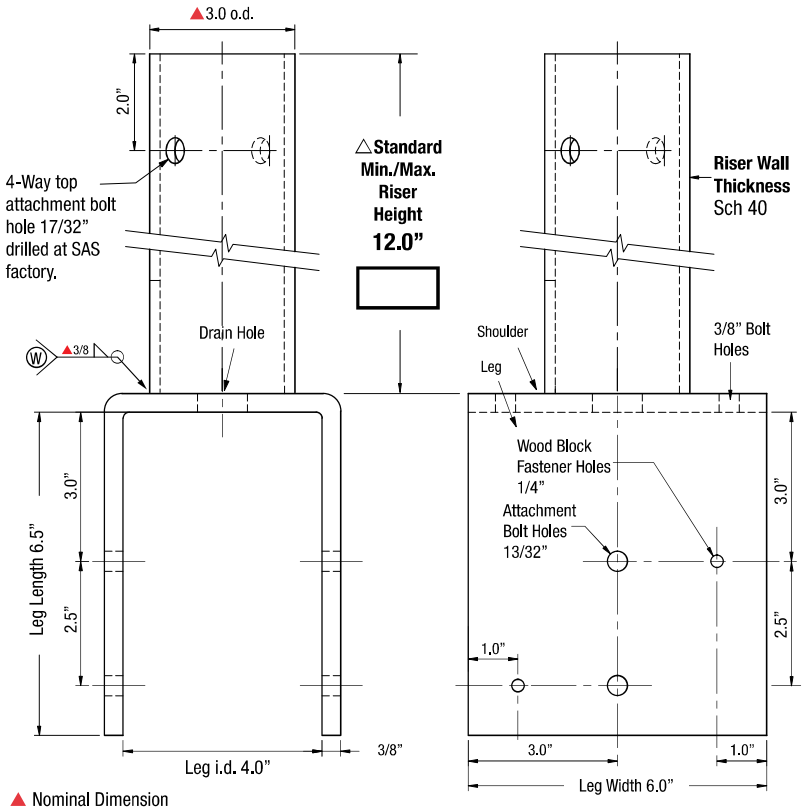

▲ Nominal Dimension

△CRZ Riser Heights
CRZ anchors have a maximum riser height of 12". CRZ-4 have a minimum riser height of 12" for base flashing compatibility with the 4-way top sleeve length.

Riser heights taller than 12" will require 3rd party structural analysis.

Fig.4

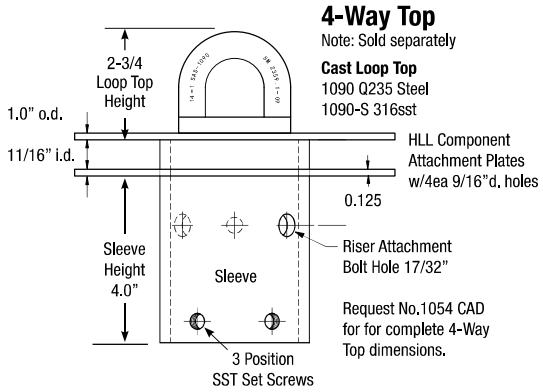

4-Way Top
Note: Sold separately
Cast Loop Top
1090 Q235 Steel
1090-S 316sst
HLL Component Attachment Plates w/4ea 9/16"d. holes
Riser Attachment Bolt Hole 17/32"
Request No.1054 CAD for for complete 4-Way Top dimensions.

Fig.3

Riser Top View
Attachment bolt hole 45° from center axis



Part No.:	**1126-4X**	**Index Pg.6**
Part Name:	**CRZ-4**	Date:
Project Name:		By:
Contractor:		
Address:		
No. ☐ **CRZ-4**	☐ **Lead Time**	

Anchor Material Specifications

Riser Ht. ☐ Sch 40 0.203 ☐ Foam Filled ☐ No Foam ☐ HDG Finish ☐ 304 sst ☐

4-Way Top

1054 HDG ☐ 1054-S 304sst ☐ Imported Steel ☐ Certified A-36 Steel ☐ **97% USA Mfg.** ☐

4-Way tops are imported.

Terms:
Anchors specified on this plan are custom mfg. and are not returnable after fabrication has been authorized by the customers purchase order. A 50% deposit or house credit account is required to begin fabrication and the balance paid upon completion or credit terms.

Authorization for Fabrication
I accept the fabrication specifications, number of units required, project name or customers name, are correct as shown on this plan.

_____ Date:_____
Print Name

_____
Sign Name

Expires in 30 days from date of customers PO.
Instructions: Sign authorization and include company or dealers purchase order.
Note: Steel prices are subject to change without notice. Unit price quotes are guaranteed only when a PO and deposit have been received. Written or verbal quotes expire after 15 days. Request re-quote before ordering.