




# SUPER ANCHOR SAFETY®

1-855-301-4575

## ANSI Custom Energy Absorber No.6181-12X Worksheet

Customer Information:		
Sold to:		
Street Address:		
City:	State:	Zip:
Phone:	Cell:	
Ship to Name:		
Street Address:		
City:	State:	Zip:

Purchasers Contact Information:	
Name:	
Send quote by e-mail:	
Purchase Order No.	Date:
Quote By: Super Anchor Safety Sales Person:	
Name:	Date:
Ph:	E-mail:

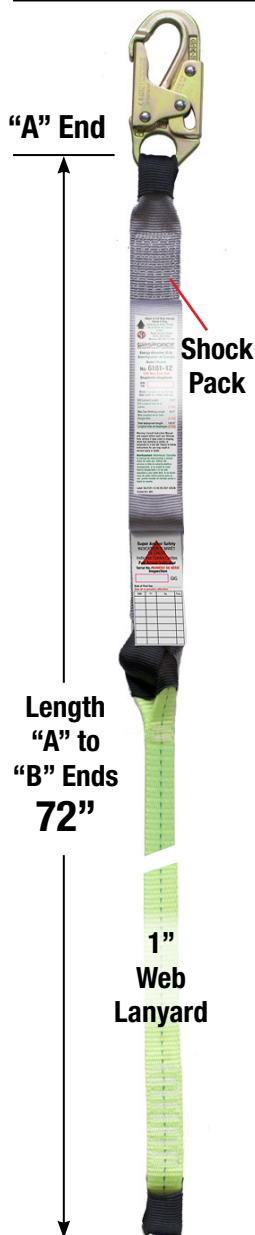

### "A" End Supplied w/No.5005-Z Snaphook Only

#### "B" End Connectors

<input type="checkbox"/> No.5005-Z Steel [YZ]	<input type="checkbox"/> No.5017-Z Dielectric	<input type="checkbox"/> No.5008-Z Rebarhook [YZ]

#### Auto-Lock Carabiners

<input type="checkbox"/> No.5001-Z Steel [YZ]	<input type="checkbox"/> No.5000-ZY Captive Aluminum	<input type="checkbox"/> No.5006-Z Anodized Aluminum

#### D-rings

<input type="checkbox"/> No.5004 Slotted [YZ]	<input type="checkbox"/> No.5018 Dielectric	<input type="checkbox"/> No.5007 Small [YZ]

#### Rope Grabs

##### Fall Arresters w/Panic Grab

	<input type="checkbox"/> No.4015-Z Steel [YZ]
	<input type="checkbox"/> No.4015-C Stainless Steel

##### Integral Adjuster

	<input type="checkbox"/> No.4015-M Steel [YZ]
--	---

### Ordering Instructions:

Not Specified for use in Canada

Mark your choices with an "X" in the space provided.

- See SAS catalog for absorber, connectors, rope grabs and compliance specifications.
- Mark "B" End connector choices.
- Complete customer information, shipping instructions and number of units. E-mail worksheet to SAS sales person.
- Upon receiving your quote, sign the "Authorized By", enter date and return to SAS sales person by e-mail with a signed purchase order.

### Purchaser to Specify Shipping

Free UPS ground in the continental US.

☐ Will Call Monroe WA. ☐ UPS Ground

#### Shipping Options

☐ Next Day ☐ 2<sup>nd</sup> Day ☐ 3<sup>rd</sup> Day

#### Ship to:

☐ HI ☐ AK ☐ Canada

Part No.	Qty	Cost/ea	Total
No.6185-XA Assembly Fee			
No.6181-12X Absorber			
B-End Connector			
Part No.			
Specify No.Units Required	Subtotal w/o tax		
	Shipping charges		
	Total amount		

"B" End ☐ Loop

Compliance: ANSI Z359.13  
Max. Free Fall: 6ft  
Max. Deployment: 66"  
Connector Compliance  
ANSI Z359.12/CSA Z259.12

Return Completed Form by e-mail to:

[paul@superanchor.com](mailto:paul@superanchor.com) [todd@superanchor.com](mailto:todd@superanchor.com)  
[jay@superanchor.com](mailto:jay@superanchor.com) [cassie@superanchor.com](mailto:cassie@superanchor.com)

ANSI 12ft Label on E/A Back Side

Warning: User Capacity Range 130-310 lbs  
**12ft. 1350lbs.**  
Maximum Free Fall Average Arresting Force  
Maximum Deployment Distance 66"  
Forces may increase when cold and/or wet  
Read Instructions Before Use.

[YZ]= Yellow Zinc  
Plated Steel

Customer: Sign and return to SAS after confirming unit price.

Authorized

By: \_\_\_\_\_ Date: \_\_\_\_\_