



# SUPER ANCHOR SAFETY®

1-855-301-4575

## Custom Energy Absorber w/WR Lanyard No.6185-X Worksheet

**Customer Information:**

Sold to:

Street Address:

City: State: Zip:

Phone: Cell:

Ship to Name:

Street Address:

City: State: Zip:

**Purchasers Contact Information:**

Name:


Send quote by e-mail:

Purchase Order No. Date:

Quote By: Super Anchor Safety Sales Person:


Name: Date:

Ph: E-mail:

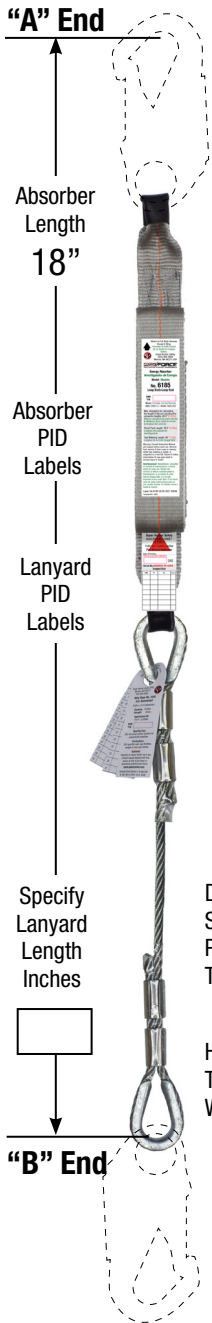

### Wire Rope Specification

- 1055-X Galvanized
- 1055-SX 316sst



3/8"x7x19

### "A" End Connector



- Eye Thimble Only

- No.5005-Z Snaphook Steel [YZ]



- No.5008-Z Rebarhook Steel [YZ]



- No.5006-Z Carabiner Anodized Aluminum



- No.5000-ZY Carabiner Captive Aluminum



- No.5001-Z Carabiner Steel [YZ]

Dual Aluminum Swages w/clear PVC Shrink Tube Cover

### "B" End Connector

- Eye Thimble Only

- No.5005-Z Snaphook Steel [YZ]

HDG or SST Eye Thimbles To match Wire Rope Type



- No.5008-Z Rebarhook Steel [YZ]

[YZ]= Yellow Zinc Plated Steel

### Ordering Instructions:

Not Specified for use in Canada

Mark your choices with an "X" in the space provided.

- 1) Complete a worksheet for each separate design. Specify number of units required.
- 2) Complete Customer, Purchasers and Shipping information and forward to SAS sales person by e-mail.
- 3) Upon receiving your quote, sign the "Authorized By", enter date, and resend to SAS sales person.

### Purchaser to Specify Shipping

Free UPS ground in the continental US.

- Will Call Monroe WA.  UPS Ground

### Shipping Options

- Next Day  2<sup>nd</sup> Day  3<sup>rd</sup> Day

### Ship to:

- HI  AK  Canada

Part No.	▲ Finished Length	Qty	Cost/ea	Total
1055-X HDG	in.			
1055-SX 316sst	in.			
1055-XA Assembly Fee				
6185 Energy Absorber				
5005-Z Snaphook				
5008-Z Rebarhook				
5006-Z Alum Carabiner				
5000-ZY Alum Carabiner				
5001-Z Steel Carabiner				
▲ 18" added to cut length for terminations			Subtotal wo/sales tax	
Specify No. Units Required			Shipping charges	
			Total amount	

Compliance: ANSI Z359.13  
 Max. Free Fall: 6ft  
 Max. Deployment: 66"

Connector Compliance  
 ANSI Z359.12/CSA Z259.12

Return Completed Form by e-mail to:  
[paul@superanchor.com](mailto:paul@superanchor.com) [todd@superanchor.com](mailto:todd@superanchor.com)  
[jay@superanchor.com](mailto:jay@superanchor.com) [cassie@superanchor.com](mailto:cassie@superanchor.com)

Customer: Sign and return to SAS after confirming unit price.

Authorized  
 By: \_\_\_\_\_ Date: \_\_\_\_\_