



Rope HLL Systems/Lanyards

No.1325 HLL rope is ideal for use with No.1207 standing seam anchor on metal panel roofing.

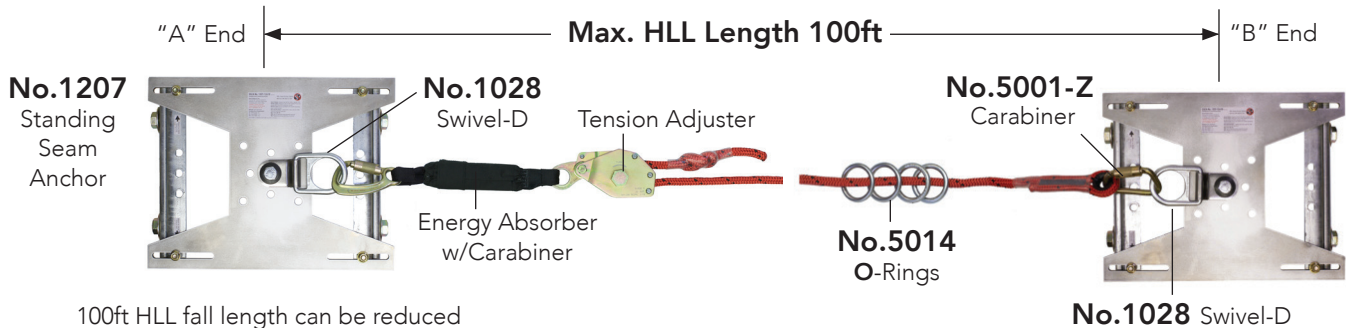

100ft HLL fall length can be reduced with intermediate anchors spaced a max. of 30ft oc.

No.1207 Intermediate Anchor w/Carabiner

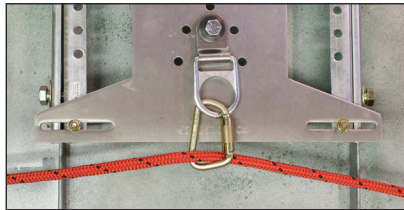

No.1326-CS

A protective sleeve hook/loop attached over connectors to prevent metal panel surface damage.



Specifications

- Min. tensile strength 5,000lb
- 12,000lb tensile strength 5/8" double braid kernmantle rope
- Aluminum swage w/clear PVC cover
- 3,600lb gate strength snaphooks
- Mfg. at SAS factory in Monroe, WA USA

30° angle is automatically set based on the rafter spacing. Does not require a HLL energy absorber. The use of a personal energy absorber is required.

Compliance

ANSI Z359.1-07/OSHA 1926.502
Snaphooks: ANSI Z359.12

User Specifications

No. Persons	Rigging
1	Fall Arrest
2	Fall Restraint

Request Unit Pricing

Part No.	Rafter Spacing/ft	HLL Length	wt/lb
▲ 1326-10	10	11'-6"	3.5
▲ 1326-12	12	13'-6"	4.5
▲ 1326-14	14	16'-0"	5.5
▲ 1326-16	16	18'-4"	7.5
▲ 1326-18	18	20'-6"	8.5
▲ 1326-20	20	23'-0"	9.5
■ 1326-X	Specify Length		

■ See custom worksheet.

Optional Accessories

Part No.	Description	wt/lb
▲ 1326-RC	Captive Rope Coupler	1
▲ 1326-CS	Protective Sleeve	
▲ 4015-VLL	HLL Rope Grab	
▲ 5014	3" od. O-Ring	

▲ Stock Part.

Accessories Order Separately
 Max. 2/per HLL Lifeline

No.1326-RC

Captive Rope Coupler
 Required to be factory installed
 not removable



No.4015-VLL

HLL Rope Grab
 Removable from HLL



No.5014 O-Rings

Removable from HLL

