

HLL 4-Way Top Anchors

HLL 4-Way Tops

A Super Anchor Safety exclusive design that allows up to 4 HLL's to be attached to a single anchor point reducing the number of end anchors required for a HLL system and provides a way to intersect additional lines at 45° and 90° angles. Use with any compatible base plate anchors or field weld risers. Attaches with a single bolt. Seal washers prevent water from entering the riser. The 4-Way top is stabilized using 3 sst socket screws. Easily removed for flashing installation.


Specifications

- 4-Way tops to fit 3.0"od. or 4.5"od. risers
- Min. tensile strength 5,000lb.
- Compatible with SAS base plate anchors, field weld risers and all SAS HLL accessories
- HLL Lengths up to 240ft.
- Anchors and 4-Way tops available in hot dip galvanized (HDG) or 304ss

Compliance ANSI Z359.18-17 Type A/T
 CSA Z259.15:22 Type A/T
 OSHA 1926.502




No. 1058 Jaw-Jaw Turnbuckle

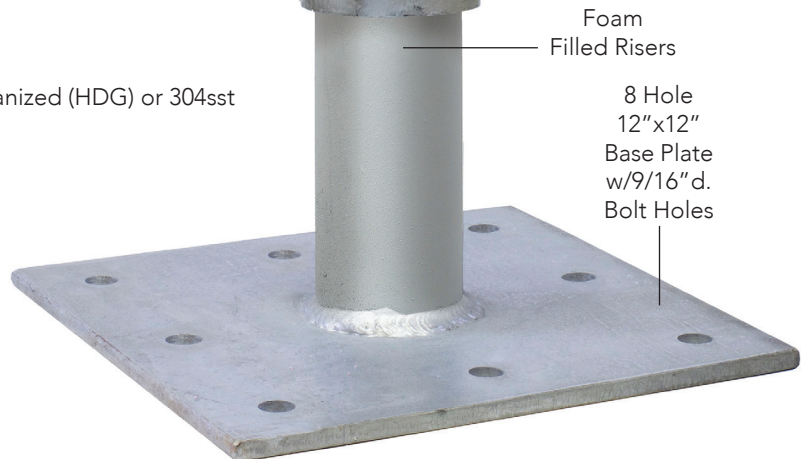

Foam Filled Risers

8 Hole 12"x12" Base Plate w/9/16"d. Bolt Holes

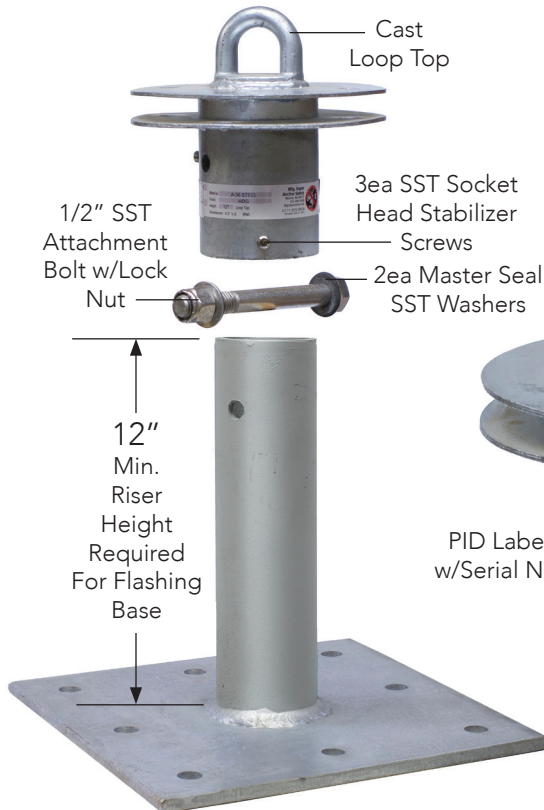


Cast Loop Top

1/2" SST Attachment Bolt w/Lock Nut

3ea SST Socket Head Stabilizer Screws

2ea Master Seal SST Washers

12" Min. Riser Height Required For Flashing Base

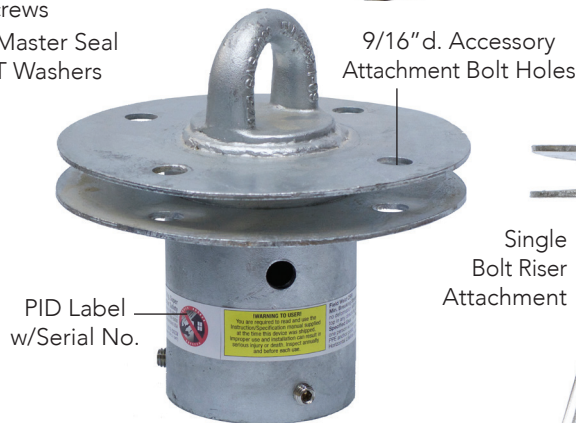

9/16"d. Accessory Attachment Bolt Holes

PID Label w/Serial No.



Single Bolt Riser Attachment

Rigging Examples

