

CRA HLL Couplers

CRA Standard Rigging Couplers

CRA couplers are specified for use with No.1090/1090-S 1-3/8" id. loop tops and are required for rigging HLL systems using CRA model anchors.

No.1087-SC pkg. Contents

- 1ea No.1087-SC 11ga 304sst coupler
- 1ea 3/8"x1" spring E/A bolt
- 1ea 5/8"x2" eye thimble bolt
- 1ea 5/8"x3" turnbuckle bolt
- Min. tensile strength 5,000lb

Compatibility

- No.1065-AS spring E/A
- No.1057/1057-S 3/8" eye thimbles
- No.1058/1058-S turnbuckles

Attachment Bolts

Spring E/A 3/8"x1"




Eye Thimble 5/8"x2"



Turnbuckle 5/8"x3"



No.1087-SC Coupler

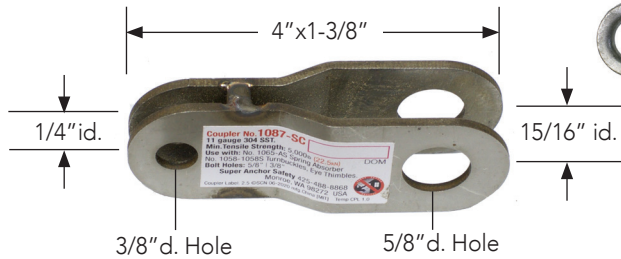

No.1057/1057-S 3/8" Eye Thimble




No.1065-AS Spring E/A



No.1058/1058-S Turnbuckle



No.1081-S Coupler

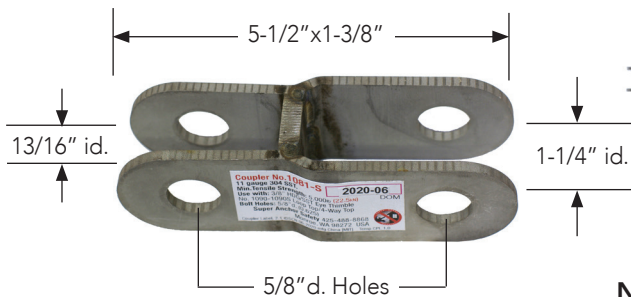

No.1054-G/1054-S 4-Way Top



No.1057/1057-S 3/8" Eye Thimble



No.1090/1090-S Loop Tops



No.1081-S pkg. Contents

- 1ea No.1081-S 11ga 304sst coupler
- 1ea 5/8"x2" eye thimble bolt
- 1ea 5/8"x2-1/4" loop top bolt
- 1ea 9/16"x2-1/4" 4-Way top bolt
- Min. tensile strength 5,000lb

Compatibility

- No.1057/1057-S 3/8" eye thimbles
- No.1054-G/1054-S 4-Way tops
- No.1090/1090-S loop top anchors

Attachment Bolts

Eye Thimble 5/8"x2"



4-Way Top 9/16"x2-1/4"



No.1090/1090-S Loop Tops
5/8"x2-1/4"



Request Unit Pricing

Part No.	Contents	wt/lb
1087-SC	See pkg. Contents	1.5
1081-S		

Note: All attachment bolts 18-8sst.