

CRR Loop Top Field Weld Risers

4.5"od. CRR Anchors

Field weld version of our CRO anchors, mfg. in the USA.

Specifications


- Min. tensile strength 5,000lb
- No.1093 Q345 steel or No.1093-S 316sst loop tops tensile strength rating of 20,000lb*
- Hot dip galvanized (HDG), 304sst or 316sst
- 3rd party engineering by DH Glabe & Assoc. Report available on request
- Contact SAS sales team for custom mfg. and lead times

Compliance

ANSI Z359.18-17 Type A/T*
 CSA A259.15:22 Type A/T*
 Window Washing: ANSI/IWCA I-14.1
 CAL-OSHA Title 8
 OSHA 1926.502
 *Request Intertek CRO Lab Reports

Specified Use

- Window Washing
- Single Person PPE
- HLL Systems

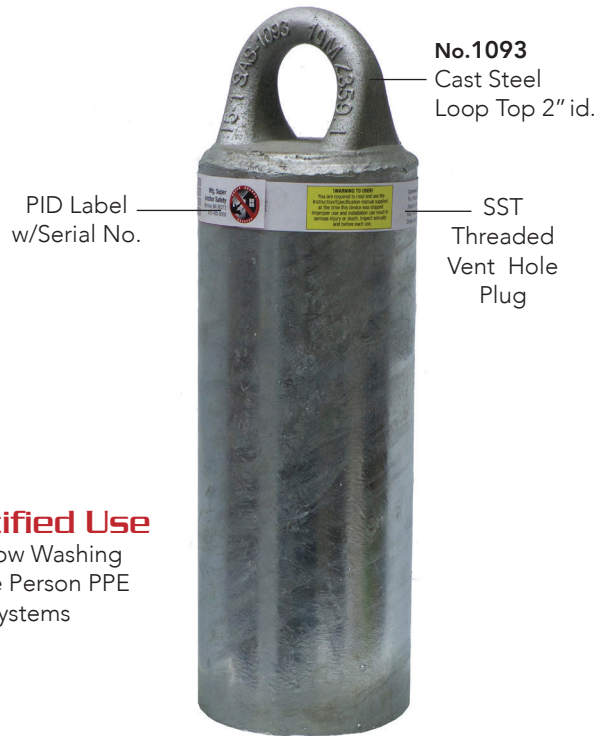

Request Unit Pricing

Riser Height	Part Name	Part No.	Material Type	Loop Top		Anchor wt/lb	Riser ▲ Sch
				No.	Type		
8	CRR-8	1201-G	■ HDG	1093	Q345	19	80 0.337 4.5"od.
		1201-S	■ 304sst	1093-S	316sst		
12	CRR-12	1202-G	■ HDG	1093	Q345	21	
		1202-S	■ 304sst	1093-S	316sst		
18	CRR-18	1203-G	■ HDG	1093	Q345	30	
		1203-S	■ 304sst	1093-S	316sst		
24	CRR-24	1204-G	■ HDG	1093	Q345	37	
		1204-S	■ 304sst	1093-S	316sst		
30	CRR-30	1205-G	■ HDG	1093	Q345	46	
		1205-S	■ 304sst	1093-S	316sst		
36	CRR-36	1206-G	■ HDG	1093	Q345	55	
		1206-S	■ 304sst	1093-S	316sst		

■ Standard Design Custom mfg. ▲ Nominal Dimension.

Note 1: Standard proof load 2,500lb. 5,000lb max. proof load if required by project specifications.

Note 2: If required, foam filling to be provided by contractor after welding.

Note 3: PID label supplied loose for application after welding.