

CRO-PT Pass-Thru Anchors

4.5"od. CRO-PT Anchors


Intermediate anchors designed for CRO HLL systems up to 240ft w/max. 30ft spacing between anchors. Pass-Thru tops are designed for use with connector ring No.5010-SM providing travel between intermediate anchors along the entire length of the HLL cable without disconnecting.

Specifications

- Horizontal lifeline intermediate anchor
- Min. tensile strength 5,000lb
- No.1091 Q235 steel or 1091-S 316sst pass-thru tops
- Hot dip galvanized (HDG), 304sst or 316sst
- HLL 3rd party engineering by DH Glabe & Assoc. Report available on request
- Contact SAS sales team for custom mfg. and lead times

Compliance

ANSI Z359.1-07
OSHA 1926.502

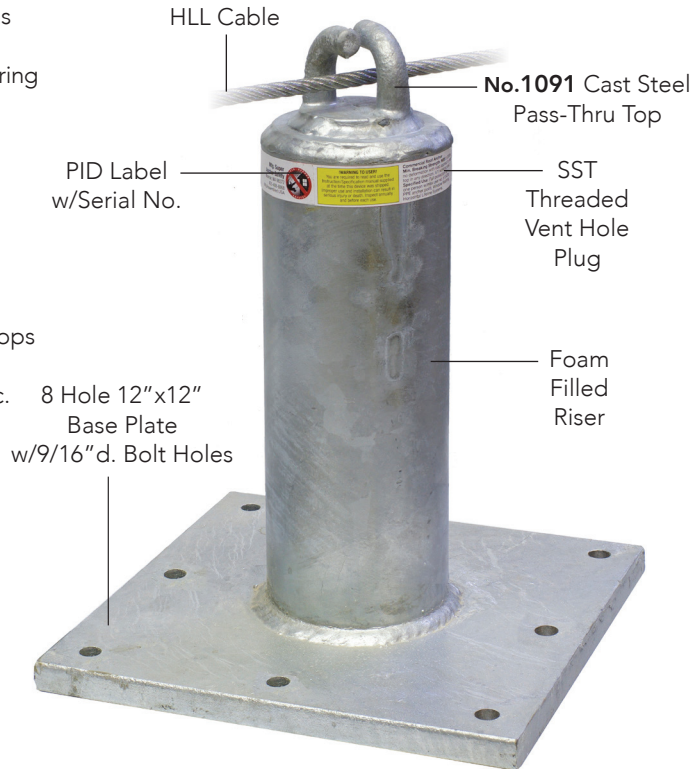

Request Unit Pricing

Riser Height	Part Name	Part No.	Material Type	Pass-Thru Top		Base Plate Inches	Anchor wt/lb	Riser ▲ Sch	
				No.	Type				
8	△ CRO-PT8	1400-PG	■ HDG	1091	Q235	12x12x5/8 8 Bolt Hole	43	80 0.337 4.5"od.	
		1400-PS	■ 304sst	1091-S	316sst				
12	△ CRO-PT12	1401-PG	■ HDG	1091	Q235				49
		1401-PS	■ 304sst	1091-S	316sst				
18	△ CRO-PT18	1402-PG	■ HDG	1091	Q235		64		
		1402-PS	■ 304sst	1091-S	316sst				
24	△ CRO-PT24	1403-PG	■ HDG	1091	Q235		73		
		1403-PS	■ 304sst	1091-S	316sst				
30	△ CRO-PT30	1404-PG	■ HDG	1091	Q235	81			
		1404-PS	■ 304sst	1091-S	316sst				
36	△ CRO-PT36	1405-PG	■ HDG	1091	Q235	12x12x3/4 8 Bolt Hole	90		
		1405-PS	■ 304sst	1091-S	316sst				

■ Standard Design Custom mfg. ▲ Nominal Dimension.
 △ Bolt, concrete embedment, expansion bolts or field welded.
 Note 1: Do not proof load pass-thru tops.
 Note 2: Backer plates may be required for installation.