


CRO HLL Couplers

CRO Standard Rigging Couplers

CRO couplers are specified for use with No.1093/1093-S 2" id. loop tops and are required for rigging HLL systems using CRO model anchors.



No.1057/1057-S
3/8" Eye Thimble

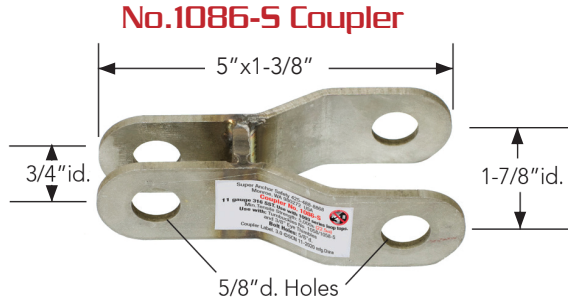

No.1086-S Coupler



No.1058/1058-S
Turnbuckle



No.1301
D-Plate



No.1093/1093-S
Loop Top



No.1065-AS
Spring E/A



No.1086-SA Coupler

1086-S pkg. Contents

1ea No.1086-S 11ga.316sst coupler
1ea 5/8"x2" eye thimble bolt
1ea 5/8"x3" turnbuckle bolt
1ea 5/8"x3" No.1093/1093-S loop top bolt
Min. tensile strength 5,000lb

Compatibility

- 3/8" Eye thimbles
- No.1093/1093-S loop top anchors
- No.1058/1058-S turnbuckles

Attachment Bolts

Eye Thimble 5/8"x2"



Turnbuckle/No.1093/1093-S Loop Tops
5/8"x3"



1086-SA pkg. Contents

1ea No.1086-SA 11ga 316sst coupler
1ea 3/8"x1" spring E/A bolt
1ea 5/8"x3" No.1093/1093-S loop top bolt
Min. tensile strength 5,000lb

Compatibility

- No.1065-AS spring E/A
- No.1093/1093-S loop top anchors

Attachment Bolts

Spring E/A 3/8"x1"



No.1093/1093-S Loop Tops 5/8"x3"



Request Unit Pricing

Part No.	Contents	wt/lb
1086-S	See pkg. Contents	1.5
1086-SA		1

CRO Standard Rigging Example

Shown without Intermediate Pass-Thru Anchors

