

# HLL Rigging Accessories

HLL accessories are components required for rigging a complete HLL system and may be purchased separately or in a kit.

## Turnbuckles


Required for HLL tensioning.

### No.1058 Galvanized

Max. Open Length 34-1/2"

Closed Length 28"

Frame Size 3/4"x14"

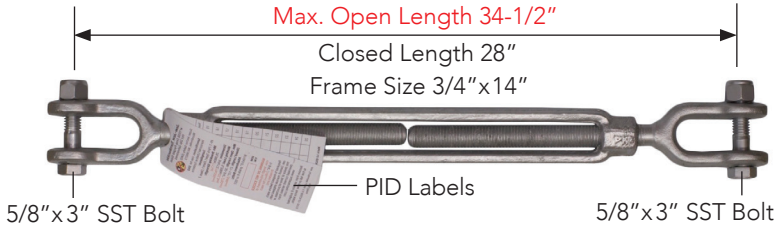


### No.1058-S 316sst

Max. Open Length 20-1/2"

Closed Length 14"

Frame Size 3/4"x8-1/2"

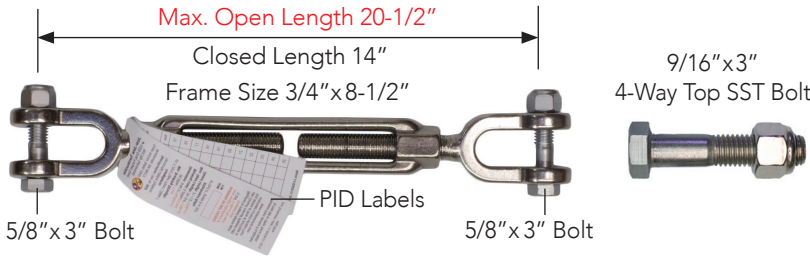

### No.1058 pkg. Contents

- 1ea No.1058 galv. turnbuckle, working load 5,200lb, min. breaking strength 26,000lb
- 2ea 5/8"x3"sst bolts
- 1ea 9/16"x3" 4-Way sst bolt

### No.1058-S pkg. Contents

- 1ea No.1058-S 316sst turnbuckle, working load 5,200lb, min. breaking strength 15,600lb
- 2ea 5/8"x3"sst bolts
- 1ea 9/16"x3" 4-Way sst bolt

## Request Unit Pricing

Part No.	Descriptions	wt/lb	pcs/pkg.
1052-G	Factory Swage Galv.	N/A	1
1052-S	Factory Swage SST		
1055-X	HLL Cable Galv.	0.243lb per/ft.	Per/HLL Length
1055-SX	HLL Cable SST		
1056	Cable Clamps Galv.	.5	1
1056-S	Cable Clamps SST		
1057	Eye Thimble Galv.	.5	1
1057-S	Eye Thimble SST		
1058	Turnbuckle Galv.	6	1
1058-S	Turnbuckle SST	5	
5010-SM	O-Ring Small Diam.	N/A	1

## 3/8"x7x19 HLL Cable



Order cut to length by the ft.

Note: SAS adds an additional 5ft to the HLL cable length

Part No.	Type	Strength	wt. per/ft.
1055-X	Galv.	14,000lb	0.243lb
1055-SX	316sst	12,500lb	

## 3/8" Cable Clamps

Field swage HLL terminations with 3/8"x7x19 cable. 3 required for swage.

### No.1056 Galvanized



### No.1056-S Stainless Steel



## 3/8" Eye Thimbles

Required for 3/8" HLL terminations.

### No.1057 Galvanized




### No.1057-S Stainless Steel



## Connector O-Ring

No.5010-SM Zinc Plated



Connects PPE to HLL cable. Sized to fit pass-thru tops. • 5,000lb min. tensile strength

## Factory/Swage

No.1052-G/S

HLL cables can be specified for one end to be factory swaged.

