

Special Application HLL Couplers

Non-Standard Rigging Couplers

Specified for use with No.1065-AC coil E/A or No.1065-AS spring E/A.
18-8 stainless steel attachment bolts and lock nuts supplied with each coupler.

No.1087-SA Coupler



No.1065-AS
Spring E/A



No.1065-AC
Coil E/A




No.1057/1057-S
3/8" Eye Thimble



No.1058/1058-S
Turnbuckle

No.1087-SB Coupler

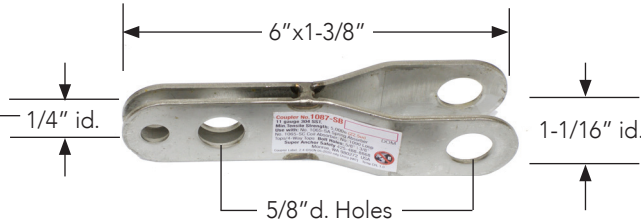

No.1054-G/1054-S
4-Way Tops



No.1090/1090-S
Loop Tops



Request Unit Pricing

Part No.	Contents	wi/lb
1087-SA	See pkg. Contents	1.5
1087-SB		

No.1087-SA pkg. Contents

- 1ea No.1087-SA 11 ga 304sst coupler
- 1ea 3/8" x 1" spring E/A bolt
- 1ea 5/8" x 1-1/2" coil E/A bolt
- 1ea 5/8" x 2" eye thimble bolt
- 1ea 5/8" x 3" turnbuckle bolt
- Min. tensile strength 5,000lb

Compatibility

- No.1065-AS spring E/A
- No.1065-AC coil E/A
- No.1057/1057-S 3/8" eye thimbles
- No.1058/1058-S turnbuckles

Attachment Bolts

18-8sst w/sst Lock Nuts

Spring E/A 3/8" x 1"



Coil E/A 5/8" x 1-1/2"



Eye Thimble 5/8" x 2"



Turnbuckle 5/8" x 3"



No.1087-SB pkg. Contents

- 1ea No.1087-SB 11 ga 304sst coupler
- 1ea 3/8" x 1" spring E/A bolt
- 1ea 5/8" x 1-1/2" coil E/A bolt
- 1ea 9/16" x 2-1/4" 4-Way top bolt
- 1ea 5/8" x 2-1/4" No.1090/1090-S loop top bolt
- Min. tensile strength 5,000lb

Compatibility

- No.1065-AS spring E/A
- No.1065-AC coil E/A
- No.1054-G/1054-S 4-Way tops
- No.1090/1090-S loop tops

Attachment Bolts

18-8sst w/sst Lock Nuts

Spring E/A 3/8" x 1"



Coil E/A 5/8" x 1-1/2"



4-Way Top 9/16" x 2-1/4"



No.1090/1090-S Loop Tops

5/8" x 2-1/4"

