

HLL Coil Energy Absorbers

No.1065-AC Coil Energy Absorber (E/A)

The Coil E/A is a non-mechanical energy absorber that is specified for use with SAS temporary HLL systems. Large diameter connector holes are compatible with carabiners, snaphooks and SAS HLL couplers. Coil E/A's are not recommended for permanent HLL use.

Specifications

- 5,000lb min. tensile strength
- 304sst
- Max. deployment length 52"
- Min. deployment force 2,500lb w/310lb/6ft free fall
- Deployment length approx. 10"


Component Compatibility

- CRA w/No.1090 loop tops
- D-Plate anchor No.1037
- Hinge-2 anchor No.3013-D
- Turnbuckles No.1058/1058-S
- Fixed Length HLL No.1336
- Couplers No.1087-SA/1087-SB

Note: Not all compatible anchors are specified here. Consult Coil Manual.

Compliance

OSHA 1926.502

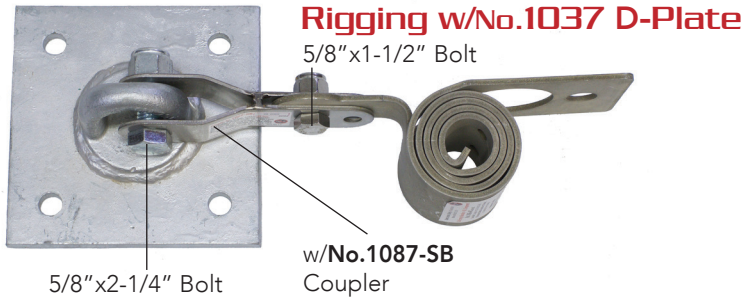

Request Unit Pricing

Part No.	pkg. Contents	wt/lb
1065-AC	1ea Coil E/A	3.5

Note: Couplers purchased separately include 18-8sst bolt w/lock nut.



Partially Deployed

