
Z-Purlin HLL Rigging Examples



HLL Rigging Example w/4-Way Intermediate Anchor

Use 4-Way for intersecting VLL's. Min. 8" riser height required for flashing base.

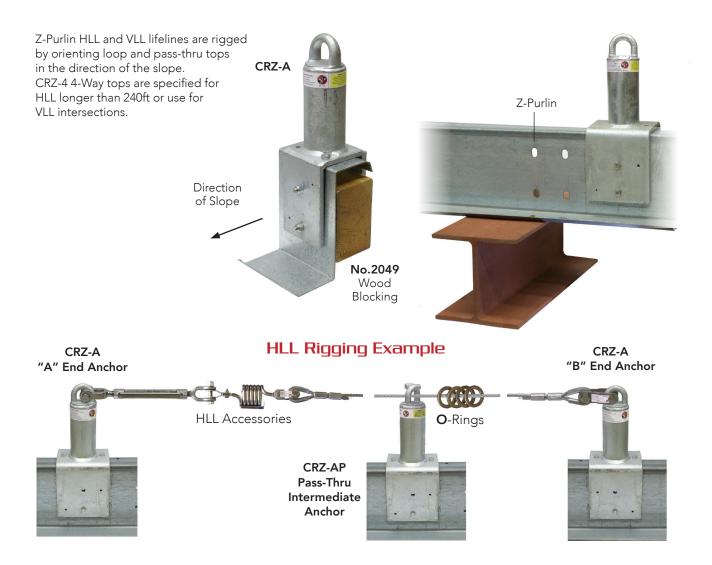